SECTION V INDEX

ROUTERS
Fixed Base....V-2 to V-4
Plunge....V-4 to V-7
Combo Base....V-7
Trim....V-8 to V-9
Surface Leveling....V-10
Flush Trim....V-10
Coving....V-10 to V-11
Corner Rounding....V-11
Bevel Edge....V-11
Laminate....V-12 to V-13

ROUTERS ACCESSORIES
Guide Rails & Accessories....V-14
Router Tables....V-15
Router Accessories....V-16
Template Guides....V-17
Bases....V-18
Collets....V-19
Specialty Accessories....V-19

FINISH NAILERS
Angled....V-20 to V-21
Straight....V-21

STAPLERS
18 Gauge....V-22 to V-23

BRAD NAILERS
15 Gauge....V-24
18 Gauge....V-24 to V-27

MICRO PINNERS
23 Gauge....V-27 to V-28
Stapler/Nailer & Repair Kits....V-28

ORBITAL SANDERS
3" Round....V-29
5" Round....V-29 to V-33
6" Round....V-31 to V-35
8" Round....V-35 to V-36
11" Round....V-36
Triangular....V-36
Rectangular....V-37 to V-39
Accessories....V-39 to V-46

BELT SANDERS
Without Dust Bag....V-47
With Dust Bag....V-47 to V-48
Accessories....V-48 to V-49

SPECIALTY SANDERS
Coving....V-49
Finishing....V-50
Detail....V-50
Linear....V-50

DUST EXTRACTORS....V-51 to V-52
Dust Extractor Accessories....V-52 to V-56

PORTABLE AIR HAMMER....V-57

BLOW GUNS....V-57

MILLING MACHINE....V-58

HEAT GUN....V-58

TOOL STORAGE SYSTEMS....V-59

PLANERS & ACCESSORIES....V-60 to V-61

CIRCULAR & MITER SAWS....V-62

MITER SAWS....V-62
Circular Saw & Miter Saw Accessories....V-63

MULTIFUNCTIONAL TABLES & ACCESSORIES....V-64

JOINERS
Doweling....V-65
Biscuit....V-65 to V-66
Accessories....V-66

JIG SAWS....V-67 to V-68
Jig Saw Accessories....V-68

DRILLS
Air Powered....V-69
Cordless....V-69 to V-70
Accessories....V-71 to V-72

AIR COMPRESSORS
Air Compressors....V-73
Air Hoses....V-73 to V-74
Accessories....V-74 to V-76

EDGEBANDING SYSTEMS....V-77

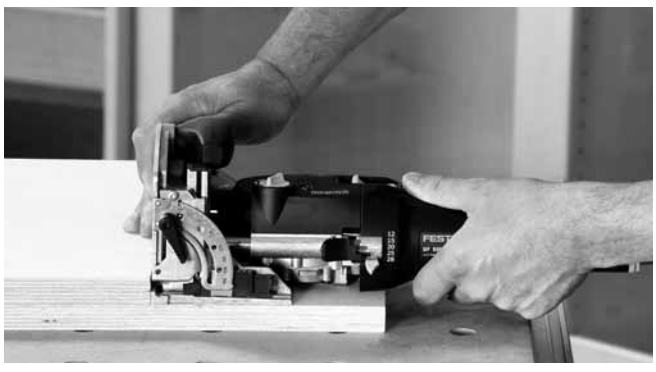

FIXED BASE ROUTER,1-3/4 HP ELECTRIC POWERED
Knob Handle Design, Single & Variable Speed

PORTER-CABLE

- Cam lock lever enables simple coarse height adjustments and motor release
- Micrometer depth adjustor accurate to 1/128"
- Dust-sealed switch and sealed ball bearing construction
- Precision machined aluminum housing and base
- Auto-release collet system allows for easy bit removal
- Under table stop prevents motor from inadvertently rotating out of base
- Base: 5-3/4" round
- Weight: 8 lb.
- Both units include: 1/4" and 1/2" collets and collet wrench

Packing & Sold In: Each

RK690LR

RK690LRVS

Item#	HP	Amps	Soft Start	Collet Capacity	No Load Speed (RPM)
RK690LR	1-3/4	11	No	1/4" & 1/2"	Single, 27,500
RK690LRVS	1-3/4	11	Yes	1/4" & 1/2"	Variable, 10,000 -27,500

FIXED BASE ROUTER, 2 HP ELECTRIC POWERED
Knob Handle Design, Single Speed

BOSCH

- Coarse and micro fine bit depth adjustment system with resettable depth indicator for fast, precise depth adjustment
- Precision centering design makes it easy to keep bit on intended cut line when using jigs, templets, dovetail fixtures and similar guidance devices
- Right or left switch location for user preference and consistency (motor does not rotate during depth adjustment)
- Tool-free templet guide adapter for fast and easy templet guide changes
- Classic hardwood handles for comfort and beauty
- Base: 6" round
- Weight: 7.5 lb.
- Includes: 1/4" and 1/2" collets, shaft wrench, collet wrench, tool-free templet guide adapter and chip shield

Packing & Sold In: Each

Item#	HP	Amps	Soft Start	Collet Capacity	No Load Speed (RPM)
BL1617	2	11	No	1/4", 3/8", 1/2"	Single, 25,000

FIXED BASE ROUTER, 2-1/4 HP ELECTRIC POWERED
Knob Handle Design, Variable Speed

BOSCH

- Constant-Response Circuitry – maintains constant speed under load, provides overload protection
- Tool-free template guide adapter system and exclusive precision centering design centers bit precisely
- Macro and microfine bit depth adjustment system with resettable depth indicator
- Fixed base has threaded holes for mounting to router table positioned in Bosch 4-hole pattern and common 3-hole pattern
- Includes RA1161 Fixed-Base with system for adjusting bit height from above a router table
- Dust-sealed power switch
- Base: 6" round
- Weight: 5.0 lb.
- Includes: 1/4" and 1/2" collets, shaftwrench, collet wrench, chip shield, height adjustment wrench

Packing & Sold In: Each

Item#	HP	Amps	Soft Start	Collet Capacity	No Load Speed (RPM)
BL1617EVS	2-1/4	12	Yes	1/4", 3/8", 1/2"	Variable, 8,000 - 25,000

FIXED BASE ROUTER, 2-1/4 HP ELECTRIC POWERED
Knob Handle Design, Variable Speed

- Full-time electronic feedback maintains motor speed
- Dual-position switch allows user to cut power while maintaining control of the router
- Spindle lock feature allows for single wrench bit changes
- Durable latch lever enables quick and simple coarse depth adjustments and motor release for transition between bases
- Rack and pinion adjustment provides fine depth settings to 1/128″
- Includes: 1/4″ and 1/2″ collets, collet wrench and carrying case

Packing & Sold In: Each

Item#	HP	Amps	Soft Start	Collet Capacity	No Load Speed (RPM)
RK892	2-1/4	12	Yes	1/4″ & 1/2″	Variable, 10,000 - 23,000

FIXED BASE ROUTER, 3-1/4 HP ELECTRIC POWERED
Side Handle Design, Single Speed

- Auto release collet system allows for quick and easy bit removal and exchange
- Precision machined aluminum motor housing and base
- Dust-Sealed switch and sealed ball bearing construction for durability
- Base: 7″ round
- Weight: 15.0 lb.
- Includes: 1/2″ collet and collet wrench

Packing & Sold In: Each

Item#	HP	Amps	Soft Start	Collet Capacity	No Load Speed (RPM)
RK7519	3-1/4	15	Yes	1/2″	Single, 21,000

FIXED BASE ROUTER, 3-1/4 HP ELECTRIC POWERED
Side Handle Design, 5 Speed

- Electronic 5 speed motor with 10,000, 13,000, 16,000, 19,000 and 21,000 rpm settings
- Dust-Sealed switch and sealed ball bearing construction for durability
- Precision machined aluminum housing and base
- Auto-release collet system allows for easy bit removal
- Base: 7″ round
- Weight: 14.5 lb.
- Includes: 1/2″ collet and collet wrench

Packing & Sold In: Each

Item#	HP	Amps	Soft Start	Collet Capacity	No Load Speed (RPM)
RK7518	3-1/4	15	Yes	1/2″	5 Speed - see text above

FIXED BASE ROUTER, 1-3/4 HP ELECTRIC POWERED
D-Handle Design, Single Speed

PORTER CABLE

- GripVac handle allows for both single hand gripping and enhanced router control when used with standard knob
- D-handle incorporates trigger switch with "lock-on" feature
- Micrometer depth adjustor accurate to 1/128"
- Dust-sealed switch and sealed ball bearing construction for durability
- Precision machined aluminum housing and base
- Auto-release collet system allows for easy bit removal
- Base: round
- Weight: 9.25 lb.
- Includes: 1/4" and 1/2" collets and collet wrench

Packing & Sold In: Each

Item#	HP	Amps	Soft Start	Collet Capacity	No Load Speed (RPM)
RK691	1-3/4	11	No	1/4" & 1/2"	Single, 27,500

FIXED BASE ROUTER, 2-1/4 HP ELECTRIC POWERED
D-Handle Design, Variable Speed

BOSCH

- Precision centering design makes it easy to keep bit on intended cutline when using jigs, templets, dovetail fixtures and similar guidance devices
- Coarse and microfine bit depth adjustment system with resettable depth indicator for fast, precise depth adjustment
- Comfortable D-handle design with reversible auxiliary handle
- Variable speed dial for matching speed to workpiece and task
- Constant Response™ Circuitry maintains constant speed under load, provides overload protection
- Double insulated
- Dust sealed power switch
- Base: 6" round
- Weight: 8.2 lb.
- Includes: 1/4" and 1/2" self-releasing collet chucks, 16mm shaft wrench, 24mm collet nut wrench and chip shield

Packing & Sold In: Each

Item#	HP	Amps	Soft Start	Collet Capacity	No Load Speed (RPM)
BL1618EVS	2-1/4	11	Yes	1/4" & 1/2"	Variable, 8,000 - 25,000

PLUNGE ROUTER, 3-1/4 HP ELECTRIC POWERED
Side Handle Design, Variable Speed

freud®

- Height adjustment system is accessible through the base for quick, accurate adjustments
- Extended spindle shaft with through the base locking system for easy above table bit changes
- Electronic regulator is sealed from dust and debris
- Base: 7-1/2" round
- Weight: 13 lb.
- Includes: 1/4" and 1/2" collets and collet wrench

Packing & Sold In: Each

Item#	HP	Amps	Soft Start	Plunge Depth	Collet Capacity	No Load Speed (RPM)
ABFT3000VCE	3-1/4	15	Yes	2-9/16"	1/4" & 1/2"	Variable, 8,000 - 21,000

PLUNGE ROUTER, 3-1/4 HP ELECTRIC POWERED

Side Handle Design, Variable Speed

BOSCH

- Converts easily for use with router table and back to upright use
- Bosch exclusive system defeats both plunge lock and plunge springs for effortless depth adjustment
- Coarse and microfine adjustment knobs plus depth rod and turret
- Variable speed dial for matching speed to work piece and task
- Constant-Response circuitry maintains constant speed under load, provides overload protection
- Precision centering design makes it easy to keep bit on intended cut line when using jigs, templets and similar devices
- Convenient front spindle lock for fast, easy bit changes
- Base: 7-1/2" round
- Weight: 13.2 lb.
- Includes: dust extraction hood, 1/4" and 1/2" self-releasing collet chucks, 24mm collet nut wrench, free templet guide adapter and vacuum hose adapter

Packing & Sold In: Each

Item#	HP	Amps	Soft Start	Plunge Depth	Collet Capacity	No Load Speed (RPM)
BL1619EVS	3-1/4	15	Yes	2-9/16"	1/4", 1/2", 3/8" & 8mm	Variable, 8,000 - 21,000

PLUNGE ROUTER, 3-1/4 HP ELECTRIC POWERED

Side Handle Design, Variable Speed

freud

- "Above the table" access to height adjustment and bit changes
- Micro adjustment depth control makes accurate settings quick and easy
- Large on/off switch quick release depth stop
- 3 position depth stop turret
- Base Round: 6-9/16"
- Weight: 13 lb.
- Includes: 1/4" and 1/2" collets, collet wrench and edge guide

Packing & Sold In: Each

Item#	HP	Amps	Soft Start	Plunge Depth	Collet Capacity	No Load Speed (RPM)
ABFT2200EP	3-1/4	15	Yes	2-9/16"	1/4" & 1/2"	Variable, 10,000 - 22,500

PLUNGE ROUTER, 3-1/4 HP ELECTRIC POWERED

Side Handle Design, 5 Speed

PORTER-CABLE

- Electronic 5 speed motor with 10,000, 13,000, 16,000, 19,000 and 21,000 rpm settings
- Auto-release collet system allows for easy bit removal
- Depth rod with 6-position adjustable turret enables stepped or repeated plunge cuts
- Handle incorporates trigger switch with lock-on feature
- Dust-sealed switch and sealed ball bearing contruction
- Base: 7" round
- Weight: 17.25 lb.
- Includes: 1/2" collet and collet wrench

Packing & Sold In: Each

Item#	HP	Amps	Soft Start	Plunge Depth	Collet Capacity	No Load Speed (RPM)
RK7539	3-1/4	15	Yes	3"	1/2"	5 Speed - see text above

PLUNGE ROUTER, 1-1/2 HP ELECTRIC POWERED

FESTOOL

Side Handle Design, Variable Speed

- Festool model #: OF 1010 EQ
- Dust extraction port
- Switch lock – locks the power switch on
- Three adjustable position stop turret for repeatable and consistent step cutting
- Full grip handle is designed for increased control and reduced fatigue
- Integrated switch with variable speed control at the thumb allows use with just one hand
- Micro adjustment depth control to 1/256"
- Base: 5" x 5-1/4" oval
- Weight: 5.94 lb.
- Shipped in Systainer 3 (see page V-61)
- Includes: chip catcher, 1/4" and 8mm collet, dust extraction hood, guide stop, plug-it power cord, guide bushing adapter

Packing & Sold In: Each

Item#	HP	Amps	Soft Start	Plunge Depth	Collet Capacity	No Load Speed (RPM)
FJ574266	1-1/2	8.3	Yes	2-1/8"	1/4" & 8mm	Variable, 10,000 - 23,000

PLUNGE ROUTER, 3-1/4 HP ELECTRIC POWERED

FESTOOL

Side Handle Design, Variable Speed

- Festool model #: OF 2200 EB
- Double locking plunge columns – the plunge depth is locked with a single twist of the locking knob located at your fingertips on the router's handle
- Retractable, spring loaded 360 degree Dust Shroud
- Single-tool ratcheting collet
- Magnetic Spindle Brake – a faster, more reliable method of retarding spindle motion
- Four position depth stop turret
- Micro adjustment depth control makes accurate settings quick and easy
- Base: 7" x 7-1/ 4" oval
- Includes: chip catcher, 1/2" collet, dust extraction hood and guide bushing
- Shipped in cardboard box
- Weight: 17.2 lb.

Packing & Sold In: Each

Item#	HP	Amps	Soft Start	Plunge Depth	Collet Capacity	No Load Speed (RPM)
FJ574277	3-1/4	18	Yes	3-5/32"	1/4", 1/2" & 8mm	Variable, 10,000 - 22,000

PLUNGE ROUTER, 2 – 2-1/4 HP ELECTRIC POWERED

FESTOOL

Side Handle Design, Variable Speed

- Festool model #: OF 1400 EQ
- Ratcheting spindle – one wrench bit changes with ratcheting action
- Template guide bushings are self-centering and can be inserted tool-free
- Swiveling chip deflector and dust extraction port
- Three adjustable position stop turret for repeatable and consistent step cutting
- Micro adjustment depth control to 1/256"
- Base: 5-1/4" x 6-1/4" oval
- Weight: 9.9 lb.
- Shipped in Systainer 4
- Includes: chip catcher, 1/4" , 1/2", and 8mm collet, dust extraction hood, plug-it power cord, guide bushing adapter

Packing & Sold In: Each

Item#	HP	Amps	Soft Start	Plunge Depth	Collet Capacity	No Load Speed (RPM)
FJ574267	2 to 2-1/4	11.7	Yes	2-3/4"	1/4", 1/2" & 8mm	Variable, 10,000 - 22,500

PLUNGE ROUTER, 2-1/4 HP ELECTRIC POWERED

freud

Knob Handle, Variable Speed

- Above-table micro-adjustability accurate to 1/128" increments
- Extended spindle shaft with through base locking feature for easy bit changes above the table
- Sealed electronic regulator and power switch for protection from dust and debris
- Base Round: 6"
- Weight: 7.5 lb.
- Includes: 1/4" collet, 1/2" collet, above table height adjustment knob and carrying case

Packing & Sold In: Each

Item#	HP	Amps	Soft Start	Plunge Depth	Collet Capacity	No Load Speed (RPM)
ABFT1700VCEK	2-1/4	13	Yes	2-1/2"	1/4" & 1/2"	Variable, 10,000 - 23,000

Accessory edge guide: ABFT2020.

ROUTER, 2-1/4 HP COMBO KIT

freud

Router with Plunge & Fixed Bases

- Above-table micro-adjustability accurate to 1/128" increments (fixed base only)
- Extended spindle shaft with through base locking feature for easy bit changes above the table (fixed base only)
- Sealed electronic regulator and power switch for protection from dust and debris
- Fixed Base Round: 6"
- Plunge Base Round: 6"
- Weight: 7.5 lb.
- Includes: fixed base, plunge base, 1/4" collet, 1/2" collet, above table height adjustment knob, and carrying case

Packing & Sold In: Each

Item#	HP	Amps	Soft Start	Plunge Depth	Collet Capacity	No Load Speed (RPM)
ABFT1702VCEK	2-1/4	13	Yes	2-1/2"	1/4" & 1/2"	Variable, 10,000 - 23,000

Accessory Edge Guide: ABFT2020.

TRIM ROUTER, ELECTRIC POWERED
Tilt-Base, 3/4 HP

- Tilt at +45 degrees, -30 degrees for angled cuts
- Precision cast aluminum base
- Dust-sealed switch and sealed ball bearing construction
- Base Dimension: 3-1/8" x 3-5/8"
- Weight: 4 lb.
- Includes: collet wrench, and Allen wrench

Packing & Sold In: Each

Item#	HP	Amps	Collet Capacity	Speed (RPM)
RK7319	3/4	5.6	1/4"	30,000

TRIM ROUTER, ELECTRIC POWERED
Adjustable Base, 1 HP

- Micro-adjustable base allows for easy adjustment and accuracy
- Base Dimension: 3-7/8" x 2-3/16"
- Weight: 4.4 lb.
- Includes: 1/4" collet and carrying case

Packing & Sold In: Each

Item#	HP	Amps	Collet Capacity	Speed (RPM)
ABFT750T	1	6.5	1/4"	27,000

TRIM ROUTER, ELECTRIC POWERED
Fixed Base, 3/4 HP

- Micro-set adjustment knob enables quick and accurate bit-depth setting
- Spindle lock feature allows for single wrench bit changes
- Precision cast aluminum base
- Dust-sealed switch and sealed ball bearing construction
- Base Dimension: 3-3/8" x 3-5/8"
- Weight: 3.75 lb.
- Includes: collet wrench

Packing & Sold In: Each

Item#	HP	Amps	Collet Capacity	Speed (RPM)
RK7310	3/4	5.6	1/4"	30,000

TRIM ROUTER, ELECTRIC POWERED
Multiple Base Kit, 1 HP

- Festool model #: MFK 700
- Integrated guide handle on the vertical and horizontal bases provide comfort and control while routing
- Quickly and easily change between the horizontal and vertical bases - all components can be attached and removed without tools
- Utilizes super fine micro-adjustment knob allowing fine tuning of the cut depth with an accuracy of 1/10mm; dual locking knobs prevent movement once the depth has been set
- Center line indention on each side of the vertical base allows you to align the center of the bit with the cut of the line
- Dust Extraction Port for a dust free environment
- Vertical base includes a threaded insert which accepts template guides adding to the versatility of this router
- Weight: 4.2 lb.
- Shipped in Systainer 2
- Includes: horizontal and vertical base, 1/4" and 8mm collets, dust extraction hood, plug-it power cord, standard threaded base for U.S guide bushing

Packing & Sold In: Each

Item#	HP	Amps	Collet Capacity	Speed (RPM)
FJ574288	1	6.0	1/4" & 8mm	10,000 - 26,000

TRIM ROUTER, ELECTRIC POWERED
Fixed, Offset, Tilt & Underscribe Bases, 3/4 HP

- Microset adjustment knob enable quick and accurate bit setting depth
- Kit comes with four bases:
  - Fixed base design allow for excellent bit visibility
  - Offset base enables back splash trimming, scribing to wall and 90 degree corner trimming
  - Tilt base enables angle cuts
  - Underscribe sub base allows user to accurately join laminate
- Weight: 3.75 lb.
- Includes: bases described above, case, carbide bit, edge guide, collet and wrenches

Packing & Sold In: Each

Item#	HP	Amps	Collet Capacity	Speed (RPM)
RK97311	3/4	5.6	1/4"	30,000

TRIM ROUTER, ELECTRIC POWERED
Laminate Seaming Router, 3/4 HP

- Porter Cable model 3/4 HP motor
- Quickly cuts perfect joints in large sheets of laminate
- Cuts both pieces of laminate at the same time for a perfect seam
- Ideal when laminates come together at a miter – no difficult placement of a jig
- Joint can be cut in place, no need to remove laminate from position to cut
- Includes: solid carbide 1/8" diameter bit and adjusting wrenches

Packing & Sold In: Each

Item#	HP	Amps	Collet Capacity	Speed (RPM)	Motor Brand
BYS7310	3/4	5.6	1/4"	30,000	Porter Cable

TRIM ROUTER, ELECTRIC POWERED
Underscribe Router, 3/4 HP

- Recommended for short cuts (1/4" – 5")
- Cuts plastic laminates for all types of joints in store fixtures, face frames, cabinets, and more
- One hand operation, tapered edge automatically lifts the overlapping laminate for cutting
- Hard coated aluminum plate will not mark laminate
- Easy to adjust eccentric cam system provides precise control of cut
- Includes: solid carbide 1/8" diameter bit and adjusting wrenches

Packing & Sold In: Each

Item#	HP	Amps	Collet Capacity	Speed (RPM)	Motor Brand
BYUPR10E	3/4	5.6	1/4"	30,000	Bosch
BYU7310	3/4	5.6	1/4"	30,000	Porter Cable

SURFACE LEVELING ROUTER, ELECTRIC POWERED
3/4 HP

- Quickly removes excess glue from solid surface material
- Aluminum parts are hard coated for durability- won't mar solid surface material
- Fine adjustments provide excellent results
- Preset to cut 3/8" from inside corner to match radius of cove
- Can be set to cut completely into a 90˚ joint
- Ideal when gluing up for coves, deck seams, inlays, etc.
- Includes: 2" diameter 6-wing carbide bit and adjusting wrenches

Packing & Sold In: Each

Item#	HP	Amps	Collet Capacity	Speed (RPM)	Motor Brand
BY252	3/4	5.6	1/4"	30,000	Porter Cable

Replacement cutter: BYEGS618

FLUSH TRIM ROUTER, ELECTRIC POWERED
1-3/4 HP

- Trim wood edges flush with a plastic laminate or wood veneer surface after edging has been applied
- Will not tear out or splinter wood
- Fine adjustment on ball bearing guide allows you to cut edging deeper than laminate surface without cutting into laminate
- Follows straight or curved edges, inside or outside radius
- Cuts edging up to 1-1/2" wide in a single pass, 3" wide in two passes
- Dust extraction hookup to prevent scratches on gloss laminates
- Includes: 1-1/2" diameter carbide bit and adjusting wrenches

Packing & Sold In: Each

Item#	HP	Amps	Collet Capacity	Speed (RPM)	Motor Brand
BY185	1-3/4	11	1/4" & 1/2"	27,500	Porter Cable

COVING ROUTER, ELECTRIC POWERED
3-1/4 HP Porter Cable Motor

- Coving system designed to create coves in any 90 degree joint in solid surfacing material
- Fine adjustments for precise control of cut
- Center guide allows router to be turned or rotated without removing it from the cut
- No tools required for adjustment
- Available Air Glide kit eliminates friction, reduces scratches and gives you better control by providing constant airflow
- Includes: 3/8" radius carbide bit, interchangeable center guides for 1/4", 3/8", 1/2" radius bits and wrenches BY210D also includes a 10' hose

Packing & Sold In: Each

Item#	Description	HP	Amps	Collet Capacity	Speed (RPM)	Motor Brand
BY210A	Coving Router without Dust Extraction	3-1/4	15	1/2"	27,500	Porter Cable
BY210D	Coving Router with Dust Extraction	3-1/4	15	1/2"	27,500	Porter Cable
BYCB3870	Replacement Bit	-	-	-	-	-
BYRA200	Air Glide Kit	-	-	-	-	-

COVING ROUTER,ELECTRIC POWERED
Air Gliding, 3-1/4 HP

- Eliminate Friction – reduces operator fatigue and increases productivity
- Reduces scratches – constant airflow prevents debris and increases accuracy of cut
- No need to lubricate top
- Includes: 3/8" radius carbide bit, interchangeable center guides for 1/4", 3/8", 1/2" radius bits and wrenches; BYAG210-D includes a 10' hose

Packing & Sold In: Each

Item#	Description	HP	Amps	Collet Capacity	Speed (RPM)	Motor Brand
BYAG210-A	Coving Router without Dust Extraction	3-1/4	15	1/2"	27,500	Porter Cable
BYAG210-D	Coving Router with Dust Extraction	3-1/4	15	1/2"	27,500	Porter Cable
BYCB3870	Replacement Bit	-	-	-	-	-

CORNER ROUNDING ROUTER, ELECTRIC POWERED
D-Handle Design, 2-1/2 HP

- Radius any 90° outside corner in seconds
- Adjustable for any radius 3/4" to 3 1/2"
- Great for countertops, tables, etc.
- Cuts material up to 2" thick
- Simply hold router on corner with one hand and pivot with the other hand
- Porter Cable 2-1/2 HP motor
- Includes: solid carbide 1/2" diameter bit, adjusting wrenches

Packing & Sold In: Each

Item#	HP	Amps	Collet Capacity	Speed (RPM)	Motor Brand
BY200	2-1/2	15	1/2"	21,000	Porter Cable

BEVEL EDGE ROUTER,ELECTRIC POWERED
Two Router System

- Ideal for countertops, store fixtures, door fronts, etc.
- Two router system for cutting a 45 degree bevel/mortise into a countertop and then cutting a feature strip to fill the mortise
- Large router comes setup with a 3/8" carbide bit for doing the 3/8" bevel
- Small router has fine tuning adjustments for precise cuts
- Can be used to repair damaged edges
- Includes: Porter Cable 690 and 7310 routers, carbide bits and adjusting wrenches

Packing & Sold In: Each

Item#	HP		Amps		Collet Capacity		Speed (RPM)		Motor Brand
	690	7310	690	7310	690	7310	690	7310	
BY165	1-3/4	3/4	11	5.6	1/4" & 1/2"	1/4"	27,500	30,000	Porter Cable

LAMINATE TRIMMER, ELECTRIC POWERED

Flush & Chamfer Cut Design

- Colonial Saw model # Lamina E2
- For chip-free and precise flush or chamfer cutting of plastic laminates, wood veneers, non-ferrous metals and most composite materials
- Exchangeable base plate made in plastic – no damage to the work-piece surface
- Square stop for flush cutting of edge banding
- Easy set-up for cutting depth and chamfer width by a simple twist of the motor
- Scale to assist in the precise setting of cutting depth and chamfer width
- Power: 300W
- Voltage: 120/230 V
- Speed: 28,000 rpm
- HM cutter: Z 4, Ø = 30 mm, cut 0° or 35°
- Weight: 4.19 lb.
- Includes: tool set, wooden case, HM cutter Z4 and square stop

Packing & Sold In: Each

Item#	Description
LM111990	Laminate Trimmer

INCLUDES CASE

TRIM ROUTER, AIR POWERED

Fixed Base

- Flush laminate trimming tool that provides effortless cutting
- Small body design fits comfortably in one hand and the tool's weight concentration is located in the base
- Works best with 1/4" diameter bits
- Weight: 2.4 lb.
- Includes: adjusting wrenches

Packing & Sold In: Each

Item#	Collet Capacity	Speed (RPM)	Air Consumption
BVAT	1/4"	25,000	3 CFM at minimum 90 PSI

LAMINATE EDGE FINISHING TOOL, AIR OR ELECTRIC POWERED

- Trims laminate without hand filing - except inside corners
- Creates a perfect radius cut on 90 degree laminate joints in a single pass
- Adjustable for different laminate thicknesses (standard or vertical grade) without tools
- Finishes filing jobs in minutes
- Patented guide system prevents any chance of gouging work
- Leaning the tools will not cut or dig in
- Includes: bit and adjusting wrenches

Packing & Sold In: Each

BVAF



BVEF

AIR VERSION

Item#	Description	Speed (RPM)	Air Consumption
BVAF	Air File Finishing Tool	25,000	3 CFM at minimum 90 PSI
BVAFC	Replacement Bit	-	-

ELECTRIC VERSION

Item#	Description	HP	Amps	Collet Capacity	Speed (RPM)
BVEF	Electric File Finishing Tool	3/40	5.6	1/4"	30,000
BVEFC	Replacement Bit	-	-	-	-

LAMINATE TRIM & FINISHING KIT, AIR POWERED

- Beaver Tool model #: Kit 102
- Laminate finishing and trimming tools
- Carbon steel body
- Includes: Air Trimmer (BVAT), Air File (BVAF), high-impact carrying case, pneumatic oil, and a swivel connector

Packing & Sold In: Each

Item#	Speed (RPM)	Air Consumption
BVKIT102	25,000	3 CFM at minimum 90 PSI

LAMINATE SEAMER, AIR POWERED

Seam With Exhaust System

- Laminate joint trimming tool glides effortlessly across one piece of laminate, while cutting the other piece to length
- Positive edge guide improves the quality of cuts by giving you a stable feel for the laminate edge
- Underscribing bit cuts the laminate cleanly for a perfect surface fit
- Custom exhaust system blows chips and dust away from the seam
- Cool running and durable tool
- Carbon steel body
- Weight: 3.5 lb.
- Includes: bit and adjusting wrenches

Packing & Sold In: Each

Item#	Description	Speed (RPM)	Air Consumption
BVASU	Air Laminate Seamer	25,000	3 CFM at minimum 90 PSI
BVASUB	Replacement Bit	-	-

GUIDE RAILS FOR PLUNGE ROUTERS
With Splinterguard

FESTOOL

- For guidance of plunge saws or routers
- Cut mark matches the cut line with the zero clearance guide rail
- Quick setup with non-slipping bottom strips
- Repeat cuts with limit stops
- System integration, same rail for saw, router or jigsaw
- Bottom T-slot clamp

Packing & Sold In: Each

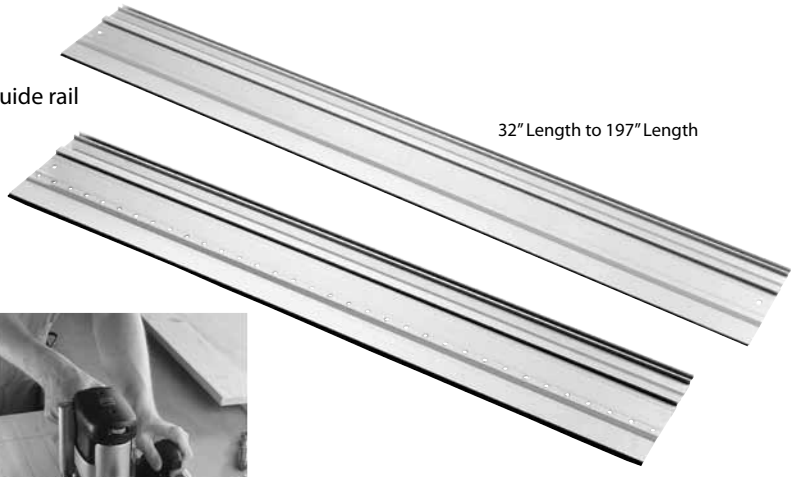

32″ Length to 197″ Length

42″ or 95″ for 32mm Hole Drilling System

Item#	Guide Rail Length
FJ491499	32″
FJ491504	42″
FJ491498	55″
FJ491503	75″
FJ491502	95″
FJ491937	106″
FJ491501	118″
FJ491500	197″
FJ491621	42″ for 32mm Hole Drilling System
FJ491622	95″ for 32mm Hole Drilling System

GUIDE RAIL ACCESSORIES

FESTOOL

NOTE: For use with Festool® series guide rails only.
Packing & Sold In: Each

	Description	Item#
A	**TOTE BAG** • Transport and store rails up to 1400mm • Bag can store 2 rails up to 1400mm in the main pocket and another 800mm rail in the front pocket • Cloth strap handles and shoulder strap	FJ466357
B	**REPLACEMENT SPLINTER GUARD** • Adhesive backed to maintain splinter free cut quality	
	FS-SP 1400 (55″) Splinterguard	FJ483164
	FS-SP 3000 (118″) Splinterguard	FJ488467
C	**GUIDE RAIL CONNECTOR** • Connects two guide rails by sliding into the T-slot grooves in the rails • 2 adjustable set screws per end for a secure connection included	FJ482107
D	**ANGLE UNIT** • Connects the upper T-slot of Festool® guide rails for setting angles on material • 180˚ marked scale • Transfer angles from the wall to the workpiece	FJ491588
E	**GECKO GUIDE RAIL ADAPTERS** • Lever actuated suction cup pads • Attach the Gecko clamp to clamp Festool® guide rails on non-porous materials	FJ493507

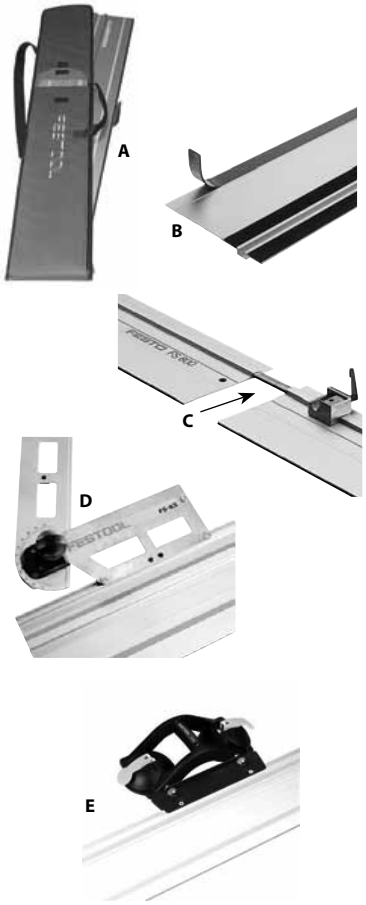

PORTABLE ROUTER TABLE SYSTEM

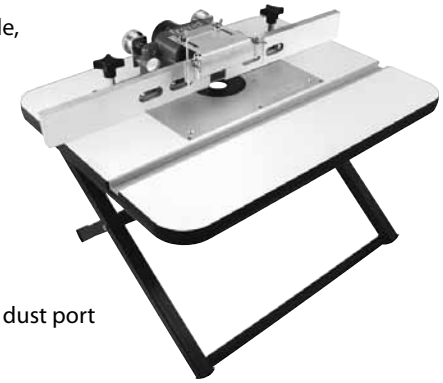

- Freud model #: RTP1000
- Features a sturdy folding stand for easy storage and portability
- Table top has a large center opening to allow the router to be removed from above the table, and features a standard 3/4" T-track for infinite adjustability
- Dual adjusting SH-5 fence has shaper/joiner capabilities and can be quickly adjusted or removed from the table
- Table height: 14"
- Top dimensions: 23.5" x 18.5"
- Plate dimensions: 9" x 12"
- Fence: Dual micro-adjustable
- System includes: aluminum insert plate with 8 leveling screws, 2 snap down rings and starter pin; sturdy table top with 3/4" T-track; SH-5 micro-adjustable fence system with dust port

Packing & Sold In: Each

Item#
ABRTP1000

ROUTER TABLE SYSTEM

- Freud model #: RTS5000
- Router table and fence combination package
- Dual adjusting SH-5 fence has shaper/joiner capabilities and is accurate to .001" on both in-feed & out-feed fences
- Sturdy 16 gauge legs
- Table height: 32" to 38"
- Top dimensions: 31.5" x 23.5" x 1"
- Plate dimensions: 9" x 12"
- Fence: Dual micro-adjustable
- System includes: adjustable steel stand; aluminum insert plate with 8 leveling screws, 2 snap down rings and starter pin; sturdy table top with 3/4" T-track; SH-5 micro-adjustable fence system with dust port

Packing & Sold In: Each

Item#
ABRTS5000

TABLE SYSTEM ACCESSORIES
Vertical Feather Board

- Freud's universal Feather Board can be used vertically or horizontally and can be adjusted for that perfect amount of tension that any task may require
- Comes with all the necessary hardware and track insert to fit standard 3/4" T-track
- For use with RTS 5000 Router Table Systems and RTP 1000

Packing & Sold In: Each

Item#
ABBF3510

ROUTER ACCESSORIES FESTOOL
Edge Guide for Of 1400EQ Plunge Router

- Plunge router edge guide
- Allows to run the router paralle! to an edge

NOTE: For use with FJ574267 (OF 1400 EQ) only.
Packing & Sold In: Each

Item#
FJ492636

ROUTER ACCESSORIES FESTOOL
Parallel Edge Guide For MFK700 Routers

- Create groove, flutes, dados, ploughs and rabbits in parallel to an edge with 1/256" (1/10mm) fine adjustment ability
- Included dust extraction hood accepts standard 27mm hose

Packing & Sold In: Each

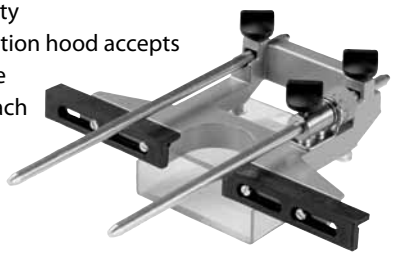

Item#
FJ495182

ROUTER ACCESSORIES FESTOOL
Guide Stop for OF 1400 EQ Plunge Router

- Plunge router guide stop with fine adjuster
- Slot in base engages rib on guide rail

NOTE: For use with FJ574267 (OF 1400 EQ) only.
Packing & Sold In: Each

Item#
FJ492601

ROUTER ACCESSORIES FESTOOL
Table Widener for OF1400 EQ Plunge Router

- Plunge router table widener
- Oversized heavy duty base plate with integrated dust hood
- Increased hole diameter for larger edge forming bits

NOTE: For use with FJ574267 (OF 1400 EQ) only.
Packing & Sold In: Each

Item#
FJ493233

ROUTER ACCESSORIES FESTOOL
Guide Rail Accessory Kit

A complete kit to maximize usage with plunge saws or routers.

- Kit includes:
  - Angle unit (491588)
  - Return/limit stop (491582)
  - Extra splinter guard 1400mm (55", 483164)
  - Deflector (489022)
  - 2 connectors (482107)
  - 2 screw clamps (489570)
  - In Systainer 1 (see page V-61) with molded insert (445433)

Packing & Sold In: Each

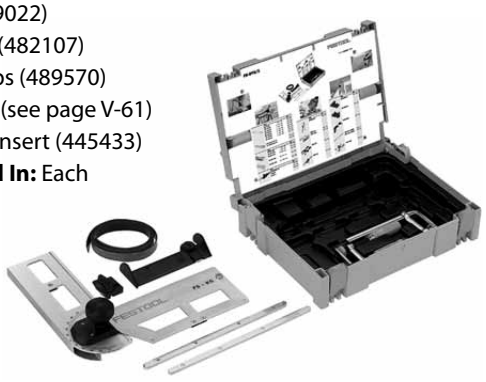

Item#
FJ492396

ROUTER ACCESSORIES FESTOOL
For Use with Festool FJ574277 Router

- Imperial accessory kit for OF 2200 EB
- Includes: Parallel edge guide, guide stop, guide rods, table widener base, small bore base, template guide base, offset base for guide rail & metric template guide bushings

Packing & Sold In: Each

Item#
FJ495249

ROUTER ACCESSORIES
FT2020 Template Guide Set

freud

- Guides and adapter are machined out of a special brass alloy for precision and long life
- Adapter plate can be used with Freud ABFT1700VCE, ABFT2000E, ABFT2200E, and ABFT3000 routers
- Template guides will work with any router or adapter that accepts universal template guides
- Set includes: all of the above template guides, adapter plate, lock nut, and a sturdy carrying case

Packing & Sold In: Each

INCLUDES CASE

Item#
ABFT2020

ROUTER ACCESSORIES
Quick Change Template Guide

BOSCH

- Use with Bosch 1613, 1614, 1617, 1618 and 1619 series routers

Packing & Sold In: Each

Item#	Application	Distance Past Base	Outside Dia.	Inside Dia.
BLRA1111	General Purpose	3/16″	5/8″	17/32″
BLRA1113	Radius Hinge, 1/4	1/2″	5/8″	17/32″

ROUTER ACCESSORIES
Template Guide Adapter

BOSCH

- Adapts Bosch 1600 series routers to accept competitive template guides
- Use with Porter Cable, Black & Decker or any similar template guides

Packing & Sold In: Each

Item#
BL2-610-906-290

ROUTER ACCESSORIES
Template Guides

PORTER CABLE

- Fit standard 1-3/16″ diameter center hole router sub-bases

Packing & Sold In: Each

Template Guide

Lock Nut

Item#	Purpose	I.D.	O.D.	Distance Past Base
RK42021	Stair Routing 1-1/8″ Thick Treads	1-1/32″	1-1/4″	7/16″
RK42024	Lock Face Routing	21/32″	3/4″	9/16″
RK42033	General Routing	13/32″	1/2″	5/16″
RK42036	General Routing	9/32″	3/8″	5/16″
RK42042	Hinge Butt Routing	5/8″	51/64″	9/16″
RK42045	For Use with Stanley T-3 Template	17/32″	5/8″	9/16″
RK42046	Omnijig Template	17/32″	5/8″	7/32″
RK42237	Lock Nut for All Template Guides			
RK42000	Template Guide Kit Contains Template #'s: 42024, 42036, 42027, 42033, 42045, 42057, 42042 and Lock Nut 42237 (2)			

ROUTER ACCESSORIES
Tilt Base

PORTER CABLE

- Use with Porter Cable 7310 when tilt base is needed
- Can also be used as replacement tilt base for Porter Cable 7319

Packing & Sold In: Each

Item#
RK7318

ROUTER ACCESSORIES
Router Base/Sub Base

PORTER CABLE

Packing & Sold In: Each

Item#	Type	Fits Router/Trimmer
RK1001	Fixed Base	100 + 690 Series
RK10695	Sub-Base	7500 Series
RK42186	Sub-Base	690 Series
RK810272	Sub-Base	309

RK Base

RK Sub-Base

ROUTER ACCESSORIES
Horizontal Base Unit for MFK700EQ Trim Router

FESTOOL

- 0˚ Unit-Designed for straight routing in the horizontal configuration
- Features 1/10mm (1/256") adjustments

Packing & Sold In: Each

Item#	Degree of Unit
FJ491427	0˚
FJ495165	1.5˚

LAMINATE TRIMMER ACCESSORIES
Trimmer Base

BOSCH

Packing & Sold In: Each

Item#	Sub-Base#	Fits Routers/ Trimmers
BL3-605-702-619	-	BL1608, 1608LX
BL3-605-702-613	BL-3-600-190-514	BL1608T

ROUTER ACCESSORIES
Underscribe Router Base For Porter Cable Trimmers

Betterley INDUSTRIES INC. POWER TOOLS

- Includes 1/8" carbide bit
- Fits Porter Cable 7310

Packing & Sold In: Each

Item#
BYUB7310

ROUTER ACCESSORIES
Deluxe Door & Jamb Hinge Template Kit

BOSCH

- Transfers directly from jamb to door (or vice-versa) with hinges on either side of door – no turning template end over end
- No straight edges, measuring tools or calculations required
- Works with or without the stops installed
- Template guide required
- Kit includes: deluxe hinge template, metal case, (1) regular & (1) extra long top gauge assembly (3601321516), template guide (82864), & bit (85159)

Packing & Sold In: Each

Item#	Description
BL83038	Template Kit
BL82864	Replacement Template Guide

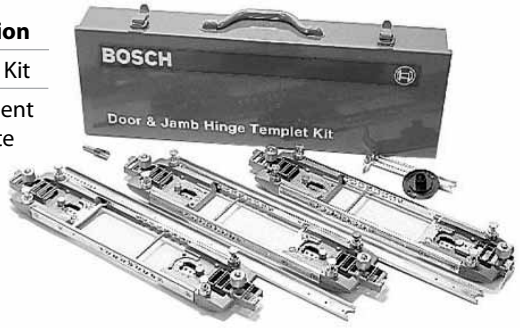

ROUTER ACCESSORIES
Router Collets

Packing & Sold In: Each

Item#	Description	For Porter Cable Models
RK42975	3/8" Collet	690 & 890 Series Bases
RK42950	1/2" Collet	690 & 890 Series Bases

ROUTER ACCESSORIES
Router Collets

Packing & Sold In: Each

Item#	Description	For Bosch Models
BL2-610-906-284	1/2" Collet	1604, 1606 and 1613 Series

ROUTER ACCESSORIES
Scribing Attachment

- Allows your offset router to precisely follow the wall while accurately cutting countertops, cabinet ends, etc.
- Designed to fit Bosch 1609, Porter Cable 312 and Porter Cable 7312 (routers sold separately).
- No turning the top around to make the cut
- Eliminates caulking
- No rub marks on walls

Packing & Sold In: Each

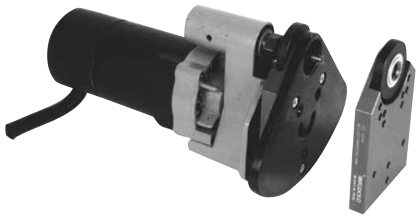

Item#
QSQUICKSCRIBE

ROUTER ACCESSORIES
Cove Stick Clamps

- Simplify the glue up for coves
- Attach only to the front of material
- Spring pressure provides even force

Packing: As shown below. Sold In: Both broken and full box quantities. Discount available for full box orders.

Item#	Box Qty
BY226	10

UNDERSCRIBE ROUTER ACCESSORIES
Drum Attachments

- Allows you to cut joints on a cylindrical surface
- Helps stabilize router perpendicular to the workpiece
- For use with BYPR10E and BYU7310 underscribe routers

Packing & Sold In: Each



Item#
BYDRUM

ROUTER ACCESSORIES
Dust Collector For Porter Cable 7500 Series

- Compatible with all Porter Cable 7500 series router bases
- Sub-base with dust collection attachment
- 1/2" thick sub-base includes dust collection nozzle to attach to most 1-1/2" hoses
- Ideal for use during plunge routing

Packing & Sold In: Each

Item#	For Porter Cable Model
RK39700	7500 Series

ANGLED FINISH NAILER, AIR POWERED

Drive 15 Gauge Angled Finishing Nails 1″ – 2″

- Applications include construction finishing, furniture and cabinets, paneling, door and window casings and upholstery trim panels
- Adjustable depth-of-drive allows for flush drive or precision countersinking at lower air pressure
- Rear exhaust directs dust away from the workpiece and is adjustable for user comfort
- Neverlube Design means no tool lubrication to stain fine woods
- No mar pad prevents scuffs on wood
- Belt hook that can be attached to either side of the tool for left or right handed users
- EZ-Clear™ Latch – to clear jams fast
- Restrictive Trigger Firing Mode: Trigger must be released and pulled each time a nail is driven
- Includes: tool and carrying case

Packing & Sold In: Each

Item#	Gauge	Fastener Range	Fastener Capacity	Operating Air Pressure	Tool Size	Weight	Mfr. Warranty
SNSFN30-620002N	15	1″ – 2″	104	70-120 psi	9-5/8″H x 12″L	3.6 lb.	1 year

ANGLED FINISH NAILER, AIR POWERED

Drive 15 Gauge Angled Finishing Nails 1-1/4″ – 2-1/2″

- Applications include construction finishing, furniture and cabinets, paneling, door and window casings and upholstery trim panels
- Thumb wheel adjustable depth-of-drive drives nails to a consistent and controllable depth
- Rear exhaust directs dust away from the workpiece and is adjustable for user comfort
- Neverlube Design means no tool lubrication to stain fine woods
- Two No-Mar pads with onboard storage to protect work materials
- Removable belt hook hooks onto your tool belt, not the tool
- EZ-Clear™ Latch – to clear jams fast
- Construction ruler etched into base of tool for quick measurements
- Magnesium housing is durable and lightweight for comfortable use over extended periods of time
- Stretch comfort grip reduces fatigue
- Restrictive Trigger Firing Mode: Trigger must be released and pulled each time a nail is driven
- Includes: tool and carrying case

Packing & Sold In: Each

Item#	Gauge	Fastener Range	Fastener Capacity	Operating Air Pressure	Tool Size	Weight	Mfr. Warranty
SNFP42XP	15	1-1/4″ – 2-1/2″	100	70-120 psi	11-5/8″H x 12″L	4.7 lb.	5 year

ANGLED FINISH NAILER, AIR POWERED

BOSCH

Drive 15 Gauge Angled Finishing Nails 1-1/4" – 2-1/2"

- Applications include baseboards, case goods, chair rails, decorative trim, furniture and paneling
- Tool-Less adjustable depth of drive
- Adjustable air exhaust
- Tool-Less quick clear for easy removal of jammed nails
- On board no mar tip storage
- In-Line self-cleaning air filter that keeps debris from the valve and 0-ring, leading to improved tool life
- Slim body for better line of sight and better control
- Dry Fire Lock-Out avoids damage to workpiece by preventing blank firing
- Tool-Less selectable trigger firing mode allows you to easily switch between:
  - Restrictive Trigger Firing Mode: trigger must be released and pulled each time a nail is driven
  - Contact Actuation: hold the trigger in and the tool will continually fire each time you bump it on the workpiece
- Includes: tool, safety glasses and carrying case

Packing & Sold In: Each

Item#	Gauge	Fastener Range	Fastener Capacity	Operating Air Pressure	Tool Size	Weight	Mfr. Warranty
BLFNA250-15	15	1-1/4" – 2-1/2"	100	60-120 psi	10"H x 11.75"L	4 lb.	1 year

STRAIGHT FINISH NAILER, AIR POWERED

BOSCH

Drive 16 Gauge Straight Finishing Nails 1" – 2-1/2"

Applications include baseboards, case goods, chair rails, decorative trim, furniture and paneling

- Tool-less adjustable depth of drive
- Adjustable air exhaust
- Tool-less Quick Clear for easy removal of jammed nails
- On board no mar tip storage
- In-line self-cleaning air filter that keeps debris from the valve and 0-ring, leading to improved tool life
- Slim body for better line of sight and better control
- Dry Fire Lock-Out avoids damage to workpiece by preventing blank firing
- Tool-Less Selectable Trigger Firing Mode allows you to easily switch between:
  - Restrictive trigger firing mode: Trigger must be released and pulled each time a nail is driven
  - Contact actuation: Hold the trigger in and the tool will continually fire each time you bump it on the workpiece
- Includes: tool, safety glasses and carrying case

Packing & Sold In: Each

Item#	Gauge	Fastener Range	Fastener Capacity	Operating Air Pressure	Tool Size	Weight	Mfr. Warranty
BLFNS250-16	16	1" – 2-1/2"	100	60-120 psi	9.94"H x 10.25"L	3.5 lb.	1 year

STAPLER, AIR POWERED
Drives 18 Gauge 1/4" Narrow Crown Staples Up to 1"

- Porter Cable model #: NS100B
- Split nose design for easy removal of jammed staples
- Rear exhausts keeps oil and dust away from work surface
- Tool free depth of drive adjustment with detents for proper setting
- Low staple load indicator
- Firing Modes: Sequential with lock off mode
- Staple Length Range: 1/2" to 1"
- Staple capacity: 100
- Dimensions: 8.75"H, 10.25"L
- Operating Air Pressure: 70 to 120 psig
- Weight: 2.6 lb.
- Lip Length: .75"
- Unit includes carrying case, sample staple pack and safety glasses

Packing & Sold In: Each

Item#	Description
RKNS100A	Sequential Trigger Stapler

STAPLER, AIR POWERED
Drives 18 Gauge 1/4" Narrow Crown Staples Up to 1-1/2"

- Porter Cable model #: NS150B
- Split nose design for easy removal of jammed staples
- Rear exhausts keeps oil and dust away from work surface
- Tool free depth of drive adjustment with detents for proper setting
- Low staple load indicator
- Firing Modes: selectable trigger with restrictive or contact actuation modes
- Staple Length Range: .5" to 1.5"
- Staple Capacity: 100
- Dimensions: 8.75"H, 10.25"L
- Operating Air Pressure: 70 to 120 psig
- Weight: 2.6 lb.
- Lip Length: .75"
- Unit includes carrying case, sample staple pack and safety glasses

Packing & Sold In: Each

Item#	Description
RKNS150A	Sequential Trigger Stapler

STAPLER, AIR POWERED
Drives 18 Gauge 1/4" Crown Staples Up to 1-1/2"

- Senco model #: SLS181W0002N
- Lightweight (only 2.9 lb.) stapler designed to drive staples into hardwoods, high power driver than can drive up to fasteners up to 1-1/2" long
- Rear exhausts keeps oil and dust away from work surface
- Easy open latch for quick loading and low staple load indicator
- Firing Modes: bump or contact actuation
- Staple Length Range: .5" to 1.5"
- Staple Capacity: 110
- Dimensions: 9"H, 10"L
- Operating Air Pressure: 70 to 120 psig
- Weight: 2.9 lb.
- Lip Length: .75"
- Unit includes case, oil, hex wrench and staple rebate coupon

Packing & Sold In: Each

INCLUDES CASE

Item#	Description
SNSLS18NR	Contact Actuation Trigger Stapler

STAPLER, AIR POWERED
Drives 18 Gauge 1/4" Narrow Crown Up to 1-1/2"



- Senco model #: SKSL4450
- Applications include: cabinets, drawers, spring clip attachment in furniture assembly, trim, molding, wood crafts
- Features E-Z Load/ E-Z Clear system
- NeverLube design requires no lubrication
- Quiet operation
- Firing Modes: contact actuation
- Staple Length Range: .875" to 1.5"
- Staple Capacity: 158
- Dimensions: 9.375" H, 12.375" L
- Operating Air Pressure: 70 to 120 psig
- Weight: 4.2 lb.

Packing & Sold In: Each

Item#
SNSKSL4450-1-1/2

STAPLER, AIR POWERED
Drives 18 Gauge 1/4" Narrow Crown Up to 1-1/2"

- Senco model #: SLS25XP-L
- Light weight (2.7 lb.) for ease of handling
- Adjustable depth-of-drive for precise staple setting
- No-mar pad keeps work surfaces free of marks
- Oil-free design means easier maintenance and no lubrication to stain fine wood
- Quiet operation
- Heavy duty components, including aluminum sleeve and piston
- Firing modes: Contact or sequential actuation
- Staple length: 3/8" to 1-1/2"
- Staple capacity: 145-168
- Dimensions: 9" H, 12" L
- Operating air pressure: 70 to 120 psi
- Weight: 2.7 lb.



Packing & Sold In: Each

Item#
SNSLS25XP-L

STAPLER, AIR POWERED
Drives 18 Gauge 1/4" Narrow Crown Up to 1-1/2"

- Bosch model #: STN150-18
- Full force technology engineered to eliminate wasted power and space
- Tool-less quick clear – easy removal of jammed staples
- Tool-less adjustable depth of drive
- Dry Fire Lock-Out – avoids damage to work materials by preventing blank firing
- Tool-less Selectable Trigger – easily switch between sequential or contact actuation
- Applications include: exterior trim, cabinetry, or countertops
- Firing Modes: Sequential and Contact Actuation
- Staple Length range: 1/2" to 1-1/2"
- Dimensions: 9.75"H, 9"L, 2.25"W
- Operating Air Pressure: 60 to 120 psig
- Weight: 2.1 lb.
- Includes: (1) pair of safety glasses, (1) no-mar tip, and carrying case

Packing & Sold In: Each

INCLUDES CASE

Item#
BLSTN150-18

STAPLER, AIR POWERED
Drives 18 Gauge 1/4" Narrow Crown Staples Up To 1-9/16"

- Würth model #: 7035770
- Applications include door and window molding, cabinet and furniture assembly, aluminum and vinyl siding
- Quick release design for removing jams
- Rear exhausts keeps oil and dust away from work surface
- Firing Modes: Selectable trigger with restrictive or contact actuation modes
- Belt hook and no-mar pad
- Staple length range: 1/2" – 1-9/16"
- Staple Capacity: 100
- Dimensions: 9.09"H, 9.53"L
- Operating Air Pressure: 72.51 to 116.03 psig
- Weight: 2.56 lb.
- Unit includes safety glasses and air tool oil

Packing & Sold In: Each

Item#
WW7035770

STAPLER, AIR POWERED
Drives 18 Gauge Brad Nails 5/8" to 1-1/4", Staples 1/2" to 1"

- Senco model #: FP2N1
- Lightweight (2.75lb.) 2 in 1 tool offers both brad nailing and stapling
- Nailing applications include: furniture repair, cabinets, drawer assembly, case backs, small trim, chair rails, picture frames and ornamentals
- Stapling applications include: shelving, soffits, fascia, cabinets, picture frames, and craft assembly
- Adjustable depth of drive
- Rear exhaust keeps oil and debris off the work surface
- No-mar magazine bumper protects the work surface
- Includes case, fitting, oil and fastener rebate
- Firing Modes: Sequential Action
- Brad nail range: 5/8" to 1-1/4"
- Staple range: 1/2" to 1"
- Staple or Brad nail capacity: 110
- Dimensions: 7-1/2" H, 10" L
- Lip Length: 0"
- Weight: 2.75 lb.
- Operating Air Pressure: 70 to 120 psi

Packing & Sold In: Each

INCLUDES CASE

Item#
SNFP2N1

BRAD NAILER, BATTERY POWERED

Drives 15 Gauge Brad Nails Up to 2-1/2"

INCLUDES CASE

- Senco model #: CF41
- Switchable drive control for sequential or contact actuation mode
- Capable of driving up to 4 nails per second and 600 nails per battery charge
- Adjustable depth-of-drive control
- No mar pad
- EZ Clear latch – to clear jams fast
- Applications include: cabinets, decorative trim, drawers, molding
- Firing Modes: Sequential or contact actuation
- Brad Nail Length range: 1-1/4" to 2-1/2"
- Brad Nail Capacity: 110
- Dimensions: 11-7/8" H, 11-3/4"L
- Battery voltage: 14.4
- Weight: 6.3 lb.
- Includes: case, 2 batteries and 1-hour charger

Packing & Sold In: Each

Item#
SNCF41

BRAD NAILER, AIR POWERED

Drives 18 Gauge Brad Nails 5/8" To 1-3/8"

INCLUDES CASE

- Senco model #: FP15MG
- Magnesium body ultra lightweight (2.19 lb.) Brad Nailer
- Applications include: chair rail, baseboards, ornamentals, case backs, cabinetry, furniture repair, small trim and craft assembly
- Oil free motor eliminates oil carryover onto the work surface
- Selectable trigger lets you control the fastening method with the flip of a switch
- Rotatable rear exhaust and belt hook keeps dust and debris of the work surface
- Includes case, swivel plug and wrench
- Firing Modes: Sequential Actuation or Contact Actuation
- Brad Nail Range: 5/8" to 1-3/8"
- Brad Nail Capacity: 110
- Dimensions: 8-1/4" H, 10-1/2" L, 2-1/2" W
- Operating Air Pressure: 70 to 120 PSI
- Air Consumption (60 cycles per min): .84scfm
- Air inlet: 1/4" NPT
- Weight: 2.19 lb.

Packing & Sold In: Each

Item#	Description
SNFP15MG	Selectable Trigger Brad Nailer

BRAD NAILER, AIR POWERED

Drives 18 Gauge Slight Head Brad Nails 5/8" To 1",
Medium Head Brads 5/8" to 1-5/8"

- Senco model #: SLP20
- Lightest weight (2.3 lb.) 2 in 1 tool offers both slight and medium head brad nailing
- Applications include: cabinets, decorative trim, drawers, furniture frames, small trim, picture frames, molding, rattan furniture window beading
- Features easy side loading that allows to change brad length without adjuting tool, plus E-Z clear jam clearance
- Oil free design means easier maintenance and no lubrication to stain fine woods
- Requires minimum maintenance, with only two movable O-rings for virtually trouble free up-keep
- Includes heavy-duty plastic case
- Firing Modes: Sequential Action
- Slight Head Brad Range: 5/8" to 1"
- Medium Head Brad Range: 5/8" to 1-5/8"
- Brad nail capacity: 110
- Dimensions: 8-1/4"H, 9-1/2"L
- Operating Air Pressure: 70 to 120 psig
- Weight: 2.3 lb.

Packing & Sold In: Each

INCLUDES CASE

Item#	Description
SNSLP20-43010N	Sequential Actuation Trigger Brad Nailer

BRAD NAILER, AIR POWERED

Drives 18 Gauge Brad Nails 5/8" To 1-3/8"

- Bosch model #: BNS200-18
- Full Force Technology engineered to eliminate wasted power and space
- Tool-less Quick Clear – easy removal of jammed nails
- Tool-less Adjustable Depth of Drive
- Dry Fire Lock-Out – avoids damage to work materials by preventing blank firing
- Tool-less Selectable Trigger – easily switch between sequential or contact actuation
- Applications include: nailing in blind spots, case goods, decorative trim, and paneling
- Firing Modes: Sequential and Contact Actuation
- Brad Nail Length Range: 5/8" to 2"
- Dimensions: 9.75"H, 9"L, 2.25"W
- Operating Air Pressure: 60 to 120 psig
- Weight: 2.1 lb.
- Includes: (1) pair of safety glasses, (1) no-mar tip, and carrying case

Packing & Sold In: Each

INCLUDES CASE

Item#	Description
BLBNS200-18	Sequential or Contact Actuation Brad Nailer

BRAD NAILER, AIR POWERED

Drives 18 Gauge Brad Nails Up to 2"

- Senco model #: FP18
- Extra power – drives fastener up to 2" in hard wood applications
- Adjustable depth-of-drive
- Rear exhaust – keeps oil and dust away from work surface
- No mar pad
- Easy open latch – for quick loading
- Low load indicator
- Belt hook
- Applications include: cabinets, small trim, chair rails, case backs, ornamentals
- Firing Modes: Sequential actuation
- Brad Nail Length range: 5/8" to 2"
- Brad Nail Capacity: 110
- Dimensions: 9.1" H, 10" L
- Operating Air Pressure: 70-120 psig
- Weight: 2.9 lb.
- Lip Length: 3/4"
- Includes case, fitting, oil and hex wrench

Packing & Sold In: Each

Item#	Description
SNFP18	Sequential Actuation Trigger Brad Nailer

BRAD NAILER, AIR POWERED

Drives 18 Gauge Brad Nails Up to 2-1/8"

- Senco model #: FP25XP
- Drives slight and medium head 18 gauge brads from 5/8" to 2-1/8"
- NeverLube technology – no lubrication required
- No mar pad
- On-tool power adjustment
- Comfort and convenient features include: overmold comfort grip, overmold trigger, 360 degree adjustable exhaust, and belt hook
- Applications include: molding, decorative trim, cabinets, drawers, picture frame assembly
- Firing Modes: Sequential actuation
- Brad Nail Length Range: 5/8" to 2-1/8"
- Brad Nail Capacity: 110
- Dimensions: 10" H, 10" L, 2.2" W
- Operating Air Pressure: 70-120 psig
- Weight: 2.7 lb.

Packing & Sold In: Each

Item#	Description
SNFP25XP	Sequential Actuation Trigger Brad Nailer

BRAD NAILER, AIR POWERED

Drives 18 Gauge Brad Nails Up To 2-1/8"

- Würth model #: 7035790
- Applications include light furniture/cabinet assembly, trim and molding, light framing, flooring and paneling
- Shoots both standard brad nails and slight head brad nails
- Quick release design for removing jams
- Rear exhausts keeps oil and dust away from work surface
- Firing Modes: Selectable trigger with restrictive or contact actuation modes
- Side loading magazine
- Belt hook and no-mar pad
- Brad Nail length range: 5/8" – 2-1/8"
- Brad Nail Capacity: 100
- Dimensions: 9.56"H, 10"L
- Operating Air Pressure: 72.51 to 116.03 psig
- Weight: 2.51 lb.
- Unit includes safety glasses and air tool oil

Packing & Sold In: Each

Item#	Description
WW7035790	Selectable Trigger Brad Nailer

BRAD NAILER, BATTERY POWERED

SENCO BRANDS

Drives 18 Gauge Brad Nails Up to 2-1/8"

- Senco model #: CF25
- Switchable drive control for sequential or contact actuation mode
- Capable of driving up to 4 nails per second and 1000 nails per battery charge
- Adjustable depth-of-drive control
- No mar pad
- EZ Clear latch – to clear jams fast
- Applications include: cabinets, decorative trim, drawers, molding
- Firing Modes: Sequential or contact actuation
- Brad Nail Length Range: 5/8" to 2-1/8"
- Brad Nail Capacity: 110
- Dimensions: 11-7/8" H, 11-3/4"L
- Battery voltage: 14.4
- Weight: 6.3 lb.
- Includes: case, 2 batteries, and 1-hour charger

Packing & Sold In: Each

INCLUDES CASE

Item#	Description
SNCF25	Selectable Trigger Cordless Brad Nailer

MICRO PINNER,AIR POWERED

PORTER CABLE

Drives 23 Gauge Micro Pins Up to 1"

- Porter Cable model #: PIN100
- Tool automatically adjusts for different fastener lengths for easier loading
- Convenient bottom-load magazine
- Rear exhaust – directs oil and dust away from user
- Dual trigger feature
- Low pin reload indicator
- Unit includes sample 23 gauge pins, 1/4" air fitting with dust cover, oil, wrench, and carrying case
- Firing Modes: Contact or Sequential Actuation
- Pin Length range: 1/2" to 1"
- Pin Capacity: 170
- Dimensions: 6.25" H, 9" L
- Operating Air Pressure: 60 to 100 psi
- Weight: 2 lb.

Packing & Sold In: Each

Item#
RKPIN100

MICRO PINNER, AIR POWERED

SENCO BRANDS

Drives 23 Gauge Headless Micro Pins Up to 1"

- Senco model #: FP10
- Extra power – for use with hard wood
- Easy fastener length adjustment – adjusts to desired fastener length
- Rear exhaust – directs oil and dust away from work surface
- Smooth metal cap & magazine
- Low load alert – visible fastener load with reload indicator
- Unit includes case, fittings, repair tools and tool oil
- Firing Modes: Sequential Actuation
- Pin Length Range: 1/2" to 1"
- Pin Capacity: 170
- Dimensions: 6-3/4"H, 8-7/8"L
- Operating Air Pressure: 70 to 95 psi
- Lip Length: 5/8"
- Hose Fitting: 1/4" NPT
- Weight: 2.35 lb.

Packing & Sold In: Each

INCLUDES CASE

Item#
SNFP10

MICRO PINNER/BRADDER, AIR POWERED

Drives 23 Gauge Microbrads 7/8" to 1-3/8", Micropins 1/2" to 1"

- Wurth model#: 11191W
- Shoots both micropins and microbrads
- Fastener range 1/2" – 1-3/8"
- Auto adjustable pusher for different fastener lengths
- Lock-out to prevent dry firing
- Removable no mar tip; belt hook
- Steel driver blade; engineered for longer life
- Rear exhaust with muffler
- Swivel adapter for hose connection
- Operating pressure: 60 – 100 psi

Packing & Sold In: Each

Item#	Description
WW11191W	Micro Pinner/Bradder
REPLACEMENT ITEMS	
WW166050	Gasket
WW166052	Gasket
WW280075	Bumper
WW300820	CPL Driver Piston
WW622176	O-Ring
WW622178	O-Ring

FASTENER TYPES	
Item#	**Size**
MICROPINS	
WWN23050F10	1/2"
WWN23058F	5/8"
WWN23075F10	3/4"
WWN23100F10	1"
MICROBRADS	
WWN23088B	7/8"
WWN23100B	1"
WWN23119B	1-3/16"
WWN23138B	1-3/8"

MICRO PINNER, AIR POWERED

Drives 23 Gauge Headless Micro Pins Up to 2"

- Senco model #: FP11
- Extra power – for use with hard wood
- Fast side load magazine with easy open latch
- Rear exhaust – directs oil and dust away from work surface
- Switchable trigger with lock
- Applications include: cabinet, decorative trim and molding
- No-mar pad keeps work surfaces free of marks
- EZ-Clear latch
- Unit includes case, fittings, repair tools and tool oil
- Firing Modes: Contact or Sequential Actuation
- Pin Length range: 1" to 2"
- Pin Capacity: 115
- Dimensions: 9.6" H, 9" L
- Operating Air Pressure: 70 to 95 psi
- Hose Fitting: 1/4" NPT
- Lip Length 1"
- Weight: 2.9 lb.

INCLUDES CASE

Packing & Sold In: Each

Item#
SNFP11

STAPLER/NAILER ACCESSORIES

Repair Kits and Parts

- Pre-packaged kits allow users themselves to perform common maintenance and minor repair tasks in air staplers and nailers
- Installation of these kits is extremely easy and no previous tool repair experience is necessary
- Fully illustrated instructions are included with each kit

Packing & Sold In: Each

Item#	Description	For Use with Tool
SNEA0075	Driver	SLP20
SNEC0177	Driver	SKS Series
SNGB0304	Feeder Cable Assembly	SKSN, SRS
SNYK0376	Feeder Spring Kit	SFN1, SKS

ORBITAL SANDER, AIR POWERED
3" Round Pad, Non-Vacuum

- Mirka model #: MR-3
- Constructed of precision molded composites for strength and durability
- Features moisture-resistant composite rotors and premium counterweight bearings
- Can be converted to a vacuum operation with the addition of a vacuum adapter
- RPM: 12,000

Packing & Sold In: Each

Item#	Description
MAMR3	Finishing Sander

ORBITAL SANDER, AIR POWERED
3" Round Pad, Vacuum & Non-Vacuum

- 3M model #'s: 20314 Non-Vacuum & 20315 Central Vacuum
- Horsepower: .28
- RPM: 12,000
- Orbital Motion: 3/32"
- Airflow Rate SCFM: 17
- Weight: 1.26 lb.
- Accessories include: clean sanding hookit pad (20350)
- Dimensions: 3.10" H x 4.90" L x 3" Dia.

Packing & Sold In: Each

Item#	Description
MM20314	Orbital Sander Non-Vacuum
MM20315	Orbital Sander Central Vacuum

ORBITAL SANDER, AIR POWERED
5" Round Pad, Non-Vacuum

- 3M model #'s: 20317, 20320
- Horsepower: .28
- RPM: 12,000
- Orbital Motion: 3/16" (20317), 3/32" (20320)
- Airflow Rate SCFM: 17
- Weight: 1.65 lb. (20317), 1.59 lb. (20320)
- Accessories included: Stikit Pad (20351)
- Dimensions: 3.26" H x 5.89" L x 5" Dia. (20317), 3.26"H x 5.84"L x 5" Dia. (20320)

Packing & Sold In: Each

Item#	Description
MM20317	3/16" Orbital Sander, Non-Vacuum
MM20320	3/32" Orbital Sander, Non-Vacuum

ORBITAL SANDER, AIR POWERED
5" Round Pad, Wet Surface

- Dynabrade model #: 57908 "Dynabug Model T"
- Unique water feed through-the-pad design allows use of standard round wet paper with holes; no special sand paper or hole punch needed
- Fingertip control valve allows for precise water flow
- RPM: 20,000
- Orbital Motion: 3/16"
- Max Air Flow @ 90 PSIG: 17
- Air Hose Connection Size: 1/4"
- Weight: 1.86 lb.
- Rear Exhaust
- Dimensions: 8"L, 4 "H
- Accessories included: all hardware for self-siphoning with 20ft. of water hose, hook-face pad (58086) and soft interface pad (53978) for contours

Packing & Sold In: Each

Item#	Description
DY57908	Orbital Sander Wet Surface

ORBITAL SANDER, ELECTRIC POWERED
5" Round Pad, Non-Vacuum

- Porter Cable model #: 7345
- Electronic variable speed dial 2,500 – 6,800 OPM
- Random, swirl free sanding action
- 100% ball bearings
- Power: 120 VAC, 50-60Hz
- Amps: 4.0
- RPM: 2,500 - 6,800
- Weight: 5.5 lb.
- 5" x 5 hole pad
- Abrasive Type: PSA
- Dimensions: 11"L, 10"W, 6"H
- Accessories included: 5", 5 hole PSA pad, abrasive disc, side handle, & operating manual

Packing & Sold In: Each

Item#	Description
RK7345	Orbital Finishing Sander Non-Vacuum

ORBITAL SANDER, ELECTRIC POWERED
5" Round Pad, Dust Collector

- Bosch model #: 3725DEVS
- Includes micro filter dust canister with integrated paper filter – optimal system for filtering fine dust
- Multi-purpose sander with pad that both orbits and rotates, duplicating natural hand sanding action and delivering a smooth, well-blended surface finish
- Trigger with lock-on button
- Power: 120VAC
- Amps: 3.3
- RPM: 4500-12,000
- Orbital Motion: 3/32"
- Weight: 5.1 lb.
- Dimensions: 12"L, 5-1/4"H
- Paper Size: 5" x 8 hole hook & loop
- Accessories included: pad wrench 5mm hex, soft backing pad, micro filter dust canister, & sanding disc

Packing & Sold In: Each

Item#	Description
BL3725DEVS	5" Round Orbital Sander Dust Collector
BL2-610-906-333	Replacement dust bags (3pk)

ORBITAL SANDER, ELECTRIC POWERED
5" Round Pad, Dust Collector

- Bosch model #: 3107DVS
- Includes micro filter dust canister with integrated paper filter – optimal system for filtering fine dust
- Multi-purpose sander with pad that both orbits and rotates, duplicating natural hand sanding action and delivering a smooth, well-blended surface finish
- Trigger with lock-on button
- Power: 120VAC
- Amps: 3.3
- RPM: 4500-13,000
- Orbital Motion: 3/32"
- Weight: 5 lb.
- Dimensions: 10-1/4"L, 7-5/8"H
- Paper Size: 5" x 8 hole hook & loop
- Accessories included: pad wrench 5mm hex, soft backing pad, micro filter dust canister, & sanding disc

Packing & Sold In: Each

Item#	Description
BL3107DVS	5" Round Orbital Sander Dust Collector
BL2-610-906-333	Replacement Dust Bags (3 Pack)

ORBITAL SANDER, ELECTRIC POWERED
5" Round Pad, Dust Collector

- Festool model #: ETS125 EQ
- ETS 125 has a 5/64"stroke for fine and superfine sanding
- Compact and lightweight enough for extended vertical and overhead use
- Step-less variable speed control
- Vibration-stop balance design delivers better finish results
- Pad brake – stops the pad quickly
- Integrated dust extraction
- Speed: 6,000 – 14,000 opm
- Sanding Stroke: 5/64"
- Weight: 2.4 lb.
- Power: 120VAC
- Amps: 1.67
- Watts: 200
- Accessories included: abrasive sample pack, filter bag with holder, plug-it power cord, Stickfix sanding pad soft, In Systainer 2 (445434)

Packing & Sold In: Each

Item#	Description
FJ571610	Orbital Sander Dust Collector

ORBITAL SANDER, ELECTRIC POWERED

FESTOOL

5" Round Pad Dual Mode, Dust Collector

- Festool model #: RO 125 FEQ
- Dual-mode sanding, aggressive mode for rapid stock removal or polishing and random orbital mode for fine sanding
- MMC Electronics provides soft-start, step-less variable speed control, constant speed under load and thermal and overload protection
- Edge protector – protective bumper guard allows you to sand right up to adjacent surfaces
- Pad brake – stops the pad quickly
- Stickfix (hook and loop) sanding system for fast replacement of sanding pad and abrasives
- Integrated dust extraction
- Speed eccentric motion: 3,000 – 6,000 opm
- Speed rotary motion: 300-600 rpm
- Sanding Stroke: 9/64"
- Weight: 4.4 lb.
- Power: 120VAC
- Amps: 4.2
- Watts: 500
- Accessories included: abrasive sample pack, auxiliary side handle, edge protector, Plug-it power cord, Stickfix sanding pad – 5", In Systainer 2 (445434)

Packing & Sold In: Each

Item#	Description
FJ571536	Dual Mode Orbital Sander Dust Collector

ORBITAL SANDER, AIR POWERED

DYNABRADE

5" & 6" Round Pad, Non-Vacuum

- Dynabrade model #'s: 69020, 69035, 69025, 69040 "Dynorbital Silver Supreme"
- Comfort Platform provides additional hand and wrist support
- Throttle lever recesses into housing grip when depressed, eliminating pressure-point on operator's palm
- Low sound levels
- Optional vacuum conversion kits available to convert into self-generated or central vacuum tool
- Horsepower: .26
- RPM: 12,000
- Orbital Motion: 3/16" diameter (69020, 69025) or 3/32" (69035, 69040)
- Weight: 1.8 lb. (69020, 69025, 69040), or 1.7 lb. (69035)
- Max Air Flow @ 90 PSIG: 16
- Air Hose Connection Size: 1/4"
- Tool Spindle Thread: 5/16"-24 Female
- Rear Exhaust
- Dimensions: 6.5"L, 3.5"H (69020, 69035) or 7"L, 3.5"H (69025, 69040)
- Accessories included: low profile sanding pad

Packing & Sold In: Each

Item#	Description
DY69020	5" Round 3/16" Orbital Sander Non-Vacuum
DY69035	5" Round 3/32" Orbital Sander Non-Vacuum
DY69025	6" Round 3/16" Orbital Sander Non-Vacuum
DY69040	6" Round 3/32" Orbital Sander Non-Vacuum

ORBITAL SANDER, AIR POWERED

DYNABRADE

5" & 6" Round Pad, Non-Vacuum

- Dynabrade model #'s: 56815 and 56826 "Dynorbital Supreme"
- Optional vacuum conversion kits available to convert into self-generated or central vacuum tool
- Rotor utilizes five blades and produces more useable power; Composite rotor is stronger and has better lubricating qualities, enabling blades to last longer
- Horsepower: .28
- RPM: 12,000
- Orbital Motion: 3/16"
- Max Air Flow @ 90 PSIG: 18
- Air Hose Connection Size: 1/4"
- Weight: 2.04 lb. (56815) or 2.06 lb. (56826)
- Tool Spindle Thread: 5/16"-24 Female
- Rear Exhaust
- Dimensions: 6-1/2"L, 3-5/8"H (56815) or 7"L, 3-1/2" H(56826)
- Accessories included: low profile sanding pad

Item#	Description
DY56815	5" Round Orbital Sander Non-Vacuum
DY56826	6" Round Orbital Sander Non-Vacuum

Packing & Sold In: Each

ORBITAL & ROTARY SANDER, AIR POWERED

5" & 6" Round Pad, Non-Vacuum

DYNABRADE

- Dynabrade model #'s: Dynalocke 58430 and 58435
- DynaLocke is truly two-tools-in-one, easily changing from a rotary Disc Sander to Random Orbital Sander with the flip of a switch
- Switch is recessed within tool grip to prevent accidental engaging
- Utilized for leveling glue seams on Corian and other solid surfaces
- Includes low profile, premium urethane, hook-face sanding pad
- 3/16" orbit for general sanding
- Tool Spindle Thread: 5/16" – 24 Female
- Horsepower: .45
- RPM: 12,000
- Orbit Motion: 3/16"
- Max Air Flow @ 90PSIG: 23
- Air Hose Connection Size: 1/4"
- Rear Exhaust
- Weight: 2.86 lb. (58430) or 2.93 lb. (58435)
- Dimensions: 11-1/6" L, 5-1/8" H

Packing & Sold In: Each

Item#	Description
DY58430	5" Orbital Sander Non-Vacuum
DY58435	6" Orbital Sander Non-Vacuum

ORBITAL SANDERS, AIR POWERED

5" & 6" Round Pad, Vacuum & Non-Vacuum

DYNABRADE

- Floating rotor utilizes five blades, producing more usable power
- High-strength, composite rotor has better lubricating qualities, allowing blades to last longer
- Throttle lever recesses into housing grip when depressed eliminating pressure-point on operator's p
- Muffling system reduces exhaust sound levels
- Speed Control allows thumb-control regulating of tool speed
- Lighter air-motor assembly, ideal for vertical and overhead sanding applications
- Optional vacuum conversion kits are available to easily convert non-vacuum tool to self-generated vacuum tool or central vacuum tool
- 3/8" orbit for aggressive sanding, 3/16" orbit for general sanding, and 3/32" for fine sanding
- Drop-In Motor available (sold separately) to reduce costly down-time
- Tool Spindle Thread: 5/16" – 24 Female
- Horsepower: .25
- RPM: 12,000
- Max Air Flow @ 90PSIG: 14
- Air Hose Connection Size: 1/4"
- Rear Exhaust

NOTE: ***SPECIAL ORDER***.

Packing & Sold In: Each



	Item#	Pad Size	Orbit Motion	Weight	Vacuum Type	Dimension (Length x Height)	Drop-In Motor Asembly
A	DY59005	5"	3/8"	1.51 lb.	None	6-1/2" x 3-1/2"	DY59453*
	DY59020	5"	3/16"	1.43 lb.	None	6-1/2" x 3-1/2"	DY59454*
	DY59035	5"	3/32"	1.39 lb.	None	6-1/2" x 3-1/2"	DY59455*
	DY59025	6"	3/16"	1.45 lb.	None	7" x 3-1/2"	DY59457*
	DY59040	6"	3/32"	1.41 lb.	None	7" x 3-1/2"	DY59458*
B	DY59023	5"	3/16"	1.49 lb.	Self-Generated	8-1/2" x 3-1/2"	DY59454*
	DY59038	5"	3/32"	1.46 lb.	Self-Generated	8-1/2" x 3-1/2"	DY59455*
	DY59028	6"	3/16"	1.51 lb.	Self-Generated	9" x 3-1/2"	DY59457*
	DY59043	6"	3/32"	1.46 lb.	Self-Generated	9" x 3-1/2"	DY59458*
C	DY59024	5"	3/16"	1.47 lb.	Central	7-1/4" x 3-1/2"	DY59454*
	DY59039	5"	3/32"	1.43 lb.	Central	7-1/4" x 3-1/2"	DY59455*
	DY59029	6"	3/16"	1.49 lb.	Central	7-3/4" x 3-1/2"	DY59457*
	DY59044	6"	3/32"	1.44 lb.	Central	7-3/4" x 3-1/2"	DY59458*

ORBITAL SANDERS, AIR POWERED
5" & 6" Round Pad, Vacuum & Non-Vacuum

- Self-Generated vacuum models are designed to work with 3M's proprietary self–contained dust collection system to trap and contain airborne particles during the finishing process
- Self-Generated vacuum models are compatible with conventional filter bags
- Accessories for self-generated vacuum models include: clean sanding hookit pad, filter bag adapter, and clean sanding filter bag
- Accessories for non-vacuum and central vacuum models include: clean sanding Hookit pad
- 5/16" orbit for aggressive sanding, 3/16" orbit for general sanding, and 3/32" for fine sanding
- Horsepower: .28
- RPM: 12,000
- Airflow Rate SCFM: 17

Packing & Sold In: Each

Item#	Pad Size	Orbit Motion	Weight	Vacuum Type	Dimensions Length x Height
MM20317	5"	3/16"	1.65 lb.	None	5.89" x 3.26"
MM20320	5"	3/32	1.59 lb.	None	5.84" x 3.26"
MM20318	5"	3/16"	1.79 lb.	Central	5.91" x 3.33"
MM20321	5"	3/32"	1.72 lb.	Central	5.86" x 3.33"
MM20319	5"	3/16"	1.83 lb.	Self-Generated	6.12" x 3.33"
MM20324	6"	5/16"	1.78 lb.	None	6.39" x 3.26"
MM20325	6"	3/16"	1.74 lb.	None	6.39" x 3.26"
MM20328	6"	3/32"	1.68 lb.	None	6.34" x 3.26"
MM20213	6"	5/16"	1.90 lb.	Central	6.35" x 3.33"
MM20326	6"	3/16"	1.90 lb.	Central	6.35" x 3.33"
MM20208	6"	5/16"	1.96 lb.	Self-Generated	6.47" x 3.33"
MM20327	6"	3/16"	1.96 lb.	Self-Generated	6.47" x 3.33"
MM20329	6"	3/32"	1.83 lb.	Self-Generated	6.31" x 3.33"

ORBITAL SANDER, ELECTRIC POWERED
6" Round Pad, Vacuum

- Fein model #: MSF 636-1
- Perfect sanding results in finishing of high quality paints, GFRP, wood, solid surface, plastic or metal
- Collects up to 98% of the sanding dust when used in conjunction with a Fein Turbo dust extractor
- Input: 380 Watts
- Output: 190 Watts
- Stroke: 5/16"
- RPM: 7,500
- Weight: 3.7 lb.
- Connector thread backing pad: 5/16"-24 UNF
- Hose connection: 1-1/4"
- Pad Size/Paper Type: 6", 8 hole, hook and loop
- Accessories included: 6" eccentric head, backing pad, protective suction hood, and wrench set

Packing & Sold In: Each

Item#	Description
FI636RO6	Orbital Sander Vacuum

ORBITAL SANDER, ELECTRIC POWERED

BOSCH

6" Round Pad, Dust Collector

- Bosch model #: 3727DEVS
- Includes micro filter dust canister with integrated paper filter – optimal system for filtering fine dust
- Multi-purpose sander with pad that both orbits and rotates, duplicating natural hand sanding action and delivering a smooth, well-blended surface finish
- Trigger with lock-on button
- Power: 120VAC
- Amps: 3.3
- RPM: 4500-12,000
- Orbital Motion: 5/64"
- Weight: 5.2 lb.
- Dimensions: 12"L, 5 1/4"H
- Paper Size: 6" x 6 hole hook & loop
- Accessories included: pad wrench 5mm hex, soft backing pad, micro filter dust canister, & sanding disc

Packing & Sold In: Each

Item#	Description
BL3727DEVS	6" Round Orbital Sander Dust Collector
BL2-610-906-333	Replacement Dust Bags (3pk)

ORBITAL SANDER,ELECTRIC POWERED

FESTOOL

6" Round Pad, Dust Collector

- Festool model #'s: ETS150/3 and ETS150/5
- ETS 150/3 has a short 1/8" stroke for superfine sanding
- ETS 150/5 has a 3/16" stroke for light or intermediate sanding
- MMC Electronics provides soft-start, step-less variable speed control, constant speed under load, and thermal and overload protection
- Vibration-stop balance design delivers better finish results
- Pad brake – stops the pad quickly
- Stickfix (hook and loop) sanding system for fast replacement of sanding pad and abrasives
- Lockable switch
- Integrated dust extraction
- Speed: 6,000 – 10,500 opm
- Sanding Stroke: 1/8"(ETS150/3) or 3/16" (ETS150/5)
- Weight: 4 lb.
- Power: 120VAC
- Amps: 2.6
- Watts: 310
- Accessories included: abrasive sample pack, filter bag with holder, plug-it power cord, Stickfix sanding pad soft, In Systainer 3 (445596)

Packing & Sold In: Each

Item#	Description
FJ571540	ETS 150/3 Orbital Sander Dust Collector
FJ571541	ETS 150/5 Orbital Sander Dust Collector

ORBITAL SANDER, ELECTRIC POWERED

FESTOOL

6" Round Pad Dual Mode Dust Collector

- Festool model #: RO 150 FEQ
- Dual-mode sanding, aggressive mode for rapid stock removal or polishing and random orbital mode for fine sanding
- MMC Electronics provides soft-start, step-less variable speed control, constant speed under load, and thermal and overload protection
- Edge protector – protective bumper guard allows you to sand right up to adjacent surfaces
- Enclosed gear unit – prevents dust from entering the gear and bearing unit
- Detachable extraction channel – streamlining the tool for tasks such as polishing
- Stickfix (hook and loop) sanding system for fast replacement of sanding pad and abrasives
- Integrated dust extraction
- Speed eccentric motion: 3,300 – 6,800 opm
- Speed rotary motion: 320-660 rpm
- Sanding Stroke: 3/16"
- Weight: 5 lb.
- Power: 120VAC
- Amps: 6
- Watts: 720
- Accessories included: abrasive sample pack, auxiliary side handle, edge protector, Plug-it power cord, removable dust channel, Stickfix sanding pad – 6", In Systainer 3 (445596)

Packing & Sold In: Each

Item#	Description
FJ571594	Dual Mode Orbital Sander Dust Collector

ORBITAL SANDER, AIR POWERED

DYNABRADE

8" Round Pad, Vacuum

- Dynabrade model #: 58414 Two-Hand Central Vacuum
- Long handle provides excellent comfort and control especially when working on vertical sides of work piece
- Horsepower: .45
- RPM: 10,000
- Orbital Motion: 3/16"
- Max Air Flow @ 90 PSIG: 23
- Air Hose Connection Size: 1/4"
- Weight: 3.75 lb.
- Rear Exhaust
- 3/8" (10 mm) diameter orbit for general sanding
- 2" outside diameter vacuum port
- Pads have 5/16"-24 male spindle
- Dimensions: 12 1/2"L, 5 5/8"H
- Accessories included: premium urethane weight-mated sanding pad

Packing & Sold In: Each

Item#	Description
DY58414	8" Round Orbital Sander Central Vacuum

ORBITAL SANDER, ELECTRIC POWERED
8" Round Pad, Vacuum

- Fein model #: 1200 E
- Covers 78% more surface area and sands 54% faster than a standard 6" sander
- Collects up to 98% of the sanding dust when used in conjunction with a Fein Turbo dust extractor
- Self-start lock to prevent injuries
- Speed control to ensure ideal performance for all applications
- Input: 1200 Watts
- Output: 750 Watts
- Stroke: 5/16"
- RPM: 0 – 7,000
- Weight: 7.7 lb.
- Connection 1-1/4"
- Dimensions: 12-5/16"L, 5-3/8"H
- Pad Size/Paper Type: 8", 16 hole, hook and loop
- Accessories included: protective suction hood, and handle

Packing & Sold In: Each

Item#	Description
FI1200	Orbital Sander Vacuum
FI1200SP	Replacement Pad

ORBITAL SANDER/ POLISHER, ELECTRIC POWERED
11" Round Pad

- The GEM sander completely stable, with no tendency to "get away" from the operator.
- 11" drive pad reduces labor by 1/2 or more
- Heavy duty machine runs at 1700 "orbits" per minute without the possibility of creating the swirl marks associated with high-speed rotary buffers
- Motor: 110v/220v , 2.3 AMPS @ 110v
- Housing: heavy-duty aluminum
- Weight: 18 lb.
- Height: 10"
- Paper Type: 3M Hookit™ II, Trizact™, Scotch-Brite™
- Orbits RPM: 1,700

Packing: Each

GSBWH

Item#	Description
GSBWH	Sander/Polisher
GSBWHS	Sander/Polisher with Shroud

ORBITAL SANDER, ELECTRIC POWERED
4" x 6" Triangular Pad, Dust Collector

- Festool model #: DTS 400 EQ
- Delta shaped pad – convex sides for sanding edges and rabbets, and a triangular point for accessing corners
- Orbital sanding motion
- Compact design and low weight for extended vertical and overhead use
- Step-less variable speed control
- Vibration-stop balance design delivers better finish results
- Stickfix (hook and loop) sanding system for fast replacement of sanding pad and abrasives
- Integrated dust extraction
- Speed: 6,000 – 14,000 opm
- Sanding Stroke: 5/64"
- Weight: 2.4 lb.
- Power: 120VAC
- Amps: 1.67
- Watts: 200
- Accessories included: filter bag with holder, plug-it power cord, stickfix sanding pad, In Systainer 2 (445434)

Packing & Sold In: Each

Item#	Description
FJ567825	Orbital Sander Dust Collector

ORBITAL SANDER, AIR POWERED

2-3/4" x 8" Rectangular Pad, Non-Vacuum & Vacuum

- Dynabrade model #'s: 57400 & 57401 Dynaline Sanders
- Quality construction pad is weight-mated to tool for low vibration, smooth operation and superior finishes
- Horsepower: .30
- SPM: 2,400
- Stroke Length: 3/8"
- Max Air Flow @ 90 PSIG: 18
- Air Hose Connection Size: 1/4"
- Weight: 2.58 lb.
- Rear Exhaust
- Dimensions: 7" L, 3-3/4" H
- Accessories included: 2-3/4" x 8" sanding pad (57454)

Packing & Sold In: Each

Item#	Description
DY57400	Orbital Sander Non-Vacuum
DY57401	Orbital Sander Self-Generated Vacuum

ORBITAL SANDER, AIR POWERED

3" x 4" Rectangular Pad, Vacuum

- 3M model #'s: 20430 Central-Vacuum & 20431 Self-Generated Vacuum
- System creates a high efficiency dust collection system when used with 3M clean sanding abrasives
- Horsepower: .24
- RPM: 10,000
- Orbital Motion: 3/16"
- Airflow Rate SCFM: 17
- Weight: 1.53 lb. (20430) & 1.58 lb. (20431)
- Model 20431 accessories include: clean sanding hookit pad (20435), filter bag adapter and clean sanding filter bag
- Model 20430 accessories include: clean sanding hookit pad (20435)
- Dimensions: 3.28:" H x 5.48" L (20430), 3.28"H x 5.6"L (20431)

Packing & Sold In: Each

Item#	Description
MM20430	Orbital Sander Central-Vacuum
MM20431	Orbital Sander Self-Generated Vacuum

ORBITAL SANDER, AIR POWERED

3" x 4-1/2" Rectangular Pad, Vacuum & Non-Vacuum

- Dynabrade model#'s: 58500 and 58505 "Dynabug II"
- Engineered and tested to ensure less tool vibration than competitive models
- Lighter tool weight minimizes hand and arm fatigue
- Horsepower: .15
- RPM: 10,000
- Orbital Motion: 3/32" for ultra fine sanding
- Weight: 1.75 lb.
- Max Air Flow @ 90 PSGI: 13
- Air Hose Connection Size: 1/4"
- Central Vacuum model has 1" outside diameter central vacuum port

Item#	Description
DY58500	Orbital Sander Non-Vacuum
DY58505	Orbital Sander with Central Vacuum

ORBITAL SANDER, AIR POWERED

3-2/3" x 9" Rectangular Pad, Non-Vacuum

- Dynabrade model #: 57810 "Dynabug"
- Excellent for sanding restricted areas and vertical sides
- Tools have heavy-duty clips to accept traditional 3-2/3" x 9" abrasive sheets (rolls also available on page Q-18)
- Horsepower: .24
- RPM: 10,000
- Orbital Motion: 3/32"
- Max Air Flow @ 90 PSIG: 16
- Air Hose Connection Size: 1/4"
- Weight: 2.66 lb.
- Rear Exhaust
- Dimensions: 7 1/4"L, 4-1/4"H
- Accessories included: 3-2/3" x 9" sanding pad (57850) for PSA abrasives

Packing & Sold In: Each

Item#	Description
DY57810	Orbital Sander Non-Vacuum

ORBITAL SANDER, AIR POWERED

4" x 4-5/16" Rectangular Pad, Non-Vacuum

- Dynabrade model #: 57920 "Model T"
- Lightweight (only 1 lb.) palm style sander has ergonomic design that features low profile grip for greater operator comfort and control
- Unit can be run with as little as a 3 HP compressor
- Horsepower: .15
- RPM: 20,000
- Orbital Motion: 3/32" for ultra fine sanding
- Weight: 1.0 lb.
- Max Air Flow @ 90 PSGI: 9
- Air Horse Connection Size: 1/4"
- Central Vacuum model has 1" outside diameter central vacuum port

Packing & Sold In: Each

Item#	Description
DY57920	Orbital Sander Non-Vacuum

ORBITAL SANDER, AIR POWERED

4" x 4-3/8" Rectangular Pad, Non-Vacuum

- Nitto Kohki model #: FS-100C "Free Sander"
- Lightweight design with minimal vibration
- High output and low air consumption motors produce high speed orbits for swirl-free finishes
- RPM: 20,000
- Orbital Motion: 1/16" diameter
- Weight: 1.1 lb.
- Max Air Flow: 85 PSI
- Air Consumption: 7.1 CFM
- Paper Size: 4-1/2" x 5-1/2"
- Accessories included: hose assembly, sanding paper, threaded adapter PT 1/4" x NPT 1/4"

Packing & Sold In: Each

Item#	Description
NOFS100C	Orbital Finishing Sander Non-Vacuum
NOTA9A367	Replacement Pad, 4" x 4-3/8"

ORBITAL SANDER, AIR POWERED

Two Rectangular Pads 3-3/8" x 7-1/4" & 3" x 6-1/4", Non-Vacuum

- National Detroit model #: 300A
- For straight-line twin pad sanding & rubbing, nothing beats the sander for productivity
- Recommended applications: wet sanding, removing orange peel, polishing, rubbing & general sanding
- Max No Load: 2,500 rpm
- Air Pressure: 60-100 psi
- Air Consumption: 7CFM (2.3 avg SCFM)
- Stroke: 1/2"
- Air Hose Connection Size: 1/4" N.P. thread
- Weight: 6 lb.
- Paper size: 3-3/8" x 7-1/4"

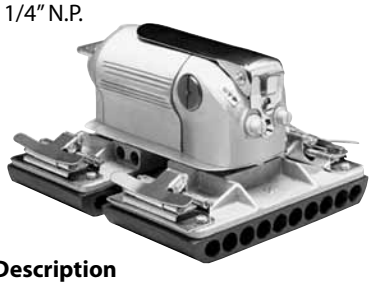

Packing & Sold In: Each

Item#	Description
ND300A	Orbital 2 Rectangular Pads Sander Non-Vacuum

ORBITAL SANDER, ELECTRIC POWERED

3-5/32"x 5-1/4" Rectangular Pad, Dust Collector

- Festool model #: RTS 400 EQ
- Rectangular shaped pad – narrow profile allows for sanding on edges and frame members
- Orbital sanding motion
- Compact design and low weight for extended vertical and overhead use
- Step-less variable speed control
- Vibration-stop balance design delivers better finish results
- Stickfix (hook and loop) sanding system for fast replacement of sanding pad and abrasives
- Integrated dust extraction
- Speed: 6,000 – 14,000 opm
- Sanding Stroke: 5/64"
- Weight: 2.4 lb.
- Power: 120VAC
- Amps: 1.67
- Watts: 200

- Accessories included: filter bag with holder, plug-it power cord, stickfix sanding pad, In Systainer 1 (445433)

Packing & Sold In: Each

Item#	Description
FJ567817	Orbital Sander Dust Collector

ORBITAL SANDER, ELECTRIC POWERED

BOSCH

4-1/2" x 4" Rectangular Pad

- Bosch model #: 1297DK
- 2.0 Amp Motor, 12,000 OPM — Ensures fast, smooth results on all surfaces
- SheetLoc™ Sandpaper Attachment System - Pulls regular sandpaper flat and tight, giving it the benefits of adhesive "stick-on" paper - fast and easy installation; efficient, uniform sanding, and longer paper life, but without stick-on paper's nearly twice-the-price cost
- Rubberized paper clamps, for firm, no-slip grip
- Also accepts stick-on paper
- Through-the-pad dust collection, for cleaner workspace
- Bosch Microfiler Dust Canister with integrated paper filter, optimal filtering system of fine dust
- Captures particles as small as a 1/2 micron
- Flush sanding ability, sands close to vertical surfaces on three sides
- Dust sealed rocker switch, convenient, easy off and on, keeps dust out
- 3-Point counterbalance, low vibration for maximum comfort
- Ergonomic, soft grip top, for comfort and control
- All ball bearing construction, for long life and smooth operation
- Includes: punchplate (2610920650), (1) sandpaper sheet , versatile carrying bag (2610922842) and microfilter dust canister (RS024)

Item#
BL1297DK

Packing & Sold In: Each

ORBITAL SANDER, ELECTRIC POWERED

PORTER CABLE

4-1/8" x 4-1/2" Rectangular Pad, Non-Vacuum

- Porter Cable model #: 330 "Speed-Bloc" Quarter-Sheet Finishing Sander
- Comfortable, easy-grip housing for hours of use without fatigue
- Rubber posts isolate your hand from vibration while enabling full sanding action
- Power: 120 VAC, 25-60Hz
- Amps: 1.2
- RPM: 14,000
- Orbital Motion: 5/64" diameter
- Weight: 4 lb.
- Accepts pre-cut adhesive or self cut standard paper with metal stamp
- Paper Size: 1/4" sheet
- Dimensions: 4.5" L x 5" W x 4.5" H
- Accessories included: abrasive sheet, clamp tool and operating manual

Packing & Sold In: Each

Item#	Description
RK330	Orbital Finishing Non-Vacuum

PLUG IT POWER CORD

FESTOOL

- 18 gauge power cord, 13' long

NOTE: For use with ETS 125 EQ and ETS 150 only.

Packing & Sold In: Each

Item#
FJ490649

ORBITAL SANDER ACCESSORIES

PORTER CABLE

Replacement Pad for RK330 Sander

- For use with Porter Cable 330 sander
- For adhesive or non-adhesive paper
- Dimensions: 4-1/2" x 4-1/8"
- Mounts using existing screws on sander for easy installation

Packing & Sold In: Each



Item#	Description
RK13597	Replacement Pad for RK330

ORBITAL SANDER ACCESSORIES

DYNABRADE

Muffler Assemblies

- Reduces sound levels of non-vacuum Dynorbital sanders to as low as 73 dB(A)
- Lightweight Kit is for older model Dynorbital sanders
- Dynorbital Supreme Kit is for all current models

Packing & Sold In: Each

Item#	Kit Type
DY56079	Lightweight
DY57112	Supreme

ORBITAL SANDER ACCESSORIES
Dust Collection System

DYNABRADE

• System includes 1" (25 mm) Dia. x 6' (1.8 m) Long 50682 flex-hose and 50683 bag with with hook-face closure

Packing & Sold In: Each

Item#	Description
DY50617	Flex Hose System
DY50683	Repl Cloth Dust Bag

ORBITAL SANDER ACCESSORIES
Micro Filter Dust Cannister

BOSCH

• Bosch model #: RS026
• For Bosch 3107DVS, 3725DVS, 3725DEVS, 3727DVS, 3727DEVS, 1293D
• Integrated paper filter traps particles as small as a 1/2 micron in dia.
• Durable and easy to empty and clean

Packing & Sold In: Each

Item#
BLRS026

TURBO DUST BAG SET
For ETS150 Random Orbit Sanders

FESTOOL

• Paper dust bag for dust extraction and one plastic holder

NOTE: For FJ571540 (ETS 150/3) and FJ571541 (ETS 150/5 EQ) only.

Packing & Sold In: 1 pack of 5 bags

Item#
FJ489631

TURBO DUST BAGS
For ETS 125 EQ & ETS 150 Random Orbit Sanders

FESTOOL

• Paper dust bag for dust extraction

NOTE: **FJ489128** for FJ571610 (ETS 125 EQ) only.
FJ487779 for FJ571540 (ETS 150/3) and FJ571541 (ETS 150/5 EQ) only.

Packing & Sold In:
1 pack of 5 bags

FJ489128

FJ487779

Item#	Box Qty
FJ489128	5
FJ487779	5

ORBITAL SANDER ACCESSORIES
Clean Sanding Filter Bag

3M

• Designed to use with self-generated vacuum system sanders fitted with threaded or press-fit exhaust air attachments
• Eliminates the need for vacuum hose which improves operator ease of use
• HEPA rated

Packing & Sold In: Each

Item#
MM20452

ORBITAL SANDER ACCESSORIES
Filter Bag Adapter

3M

• Used to attach 3M clean sanding filter bag to self generating vacuum orbital and random orbital sanders
• 1" external hose thread which attaches to 3M sander and 1" inside diameter tubing that attaches to 3M clean sanding filter bag

Packing and Sold In: Each

Item#
MM20453

ORBITAL SANDER ACCESSORIES
Disposable Dust Bags For MR Sanders

MIRKA

• Disposable dust bags for self-generated vacuum Mirka MR orbital sanders

Packing: 10 per box.
Sold in: Full box quantities only.

Item#	Description
MA9320	Disposable Dust Bags for Mirka MR Sanders

ORBITAL SANDER ACCESSORIES
Dynorbital Tune-Up Kit

DYNABRADE

• Includes assorted parts to maintain Dynorbital sander motors in tip-top shape
• Lightweight Kit is for older model Dynorbital sanders
• Dynorbital Supreme Kit is for all current models

Packing & Sold In: Each

Item#	Kit Type
DY95524	Lightweight
DY96024	Supreme

ORBITAL SANDER ACCESSORIES
Fein Triangular Hook & Loop Sanding Pad

- For use with Fein Multimaster sander
- Hook and Loop allows for grit switching in the middle of job
- Aluminum backed pad

Packing: 2 per pack.
Sold In: Full packs only.

Item#	Description
FI636T-HLP	Triangle Hook & Loop Sanding Pad

ORBITAL SANDER ACCESSORIES
Festool Triangle Stickfix Sanding Pads

A - FJ488715

- For use with Festool DX93E only
- 3-11/16" (93mm)
- Snap Stud connector (2 pieces) for quick pad changes
- Stickfix hard pads help maintain a crisp and flat surface, especially on edges
- Stickfix soft pads are high temperature resistant for heavy duty applications

Packing: Pack of 2 each.
Sold In: Full packs only.



B - FJ488716

	Item#	Description
A	FJ488715	Triangle Stickfix Soft Pad
B	FJ488716	Triangle Stickfix Hard Pad

ORBITAL SANDER ACCESSORIES
Mirka 2-7/8" Soft Interface Pad

- Interface pad is used in combination with hook and loop sanding disc for sanding rounded surfaces and contours
- Interface pad is placed between the backup pad and the abrasive disc
- 3/4" thickness, 2-7/8" diameter

Packing and Sold in: Each

Item#	Description
MA1022SF	Grip Soft Faced Interface Pad

ORBITAL SANDER ACCESSORIES
Make Your Own Pad Kit

- Create custom profile pads
- Ideal for use with Dynaline in-line finishing sanders (DY57400, DY57401)
- Contents allow for making one pad per kit

Packing & Sold In: Each

Item#
DY57480

ORBITAL SANDER ACCESSORIES
Festool Do It Yourself Sanding Pad Kit

- For use with Festool LS 130 EQ only
- Create your own sanding pad to match custom profiles

Packing & Sold In: Each

Item#	Description
FJ490780	Do It Yourself Sanding Pad Kit

ORBITAL SANDER ACCESSORIES
Abranet 5" & 6" Grip Faced Interface Pads

- Interface pad is used in combination with hook and loop sanding disc for sanding rounded surfaces and contours
- Interface pad is placed between the backup pad and the abrasive disc
- 1/2" thickness, 5" and 6" diameter

Packing: 5 per box, 5 boxes per carton.
Sold in: Full box quantity only.
Discount available for full carton orders.

A - MA9155

B - MA9166

	Item#	Description
A	MA9155	5" Abranet Interface Pad
B	MA9166	6" Abranet Interface Pad

ORBITAL SANDER ACCESSORIES
MIRKA

Mirka 6" Interface Pad

- Interface pad is used in combination with hook and loop sanding disc for sanding rounded surfaces and contours
- Interface pad is placed between the backup pad and the abrasive disc
- 1/2" thickness, 6" diameter

Packing: 5 per box.
Sold in: Both broken and full box quantities. Discount available for full box orders.

Item#
MA1066

ORBITAL SANDER ACCESSORIES
FESTOOL

Festool 6" Soft Felt Pad

- For use with Festool RO 150 FEQ only
- Soft felt pad for pre-polishing new paints, finishes, and plastics for wood
- 6" diameter

Packing: Pack of 5 each.
Sold In: Full packs only.

Item#	Description
FJ488347	6" Soft Felt Pad

ORBITAL SANDER ACCESSORIES
FESTOOL

Festool Stickfix 5" & 6" Polishing Pads

- 5" for use with Festool RO 125 FEQ only
- 6" for use with Festool RO 150 FEQ only
- Stickfix polishing pad
- Thinner and harder than sanding pads
- For use on polishing media such as felts, sponges and sheepskin

Packing & Sold In: Each

A - FJ492128

A - FJ493914

	Item#	Description
A	FJ492128	5" Stickfix Polishing Pad
B	FJ493914	6" Stickfix Polishing Pad

ORBITAL SANDER ACCESSORIES
FESTOOL

Festool 5" & 6" Interface Pads

- 5" for use with Festool ETS 125 EQ only
- 6" for use with Festool ETS 150/3 EQ & ETS 150/5 EQ only
- Interface pad for super fine abrasives – soft
- For profiles and contours
- Allows abrasive to float easier on the surface for smoother results

Packing & Sold In: Each

Item#	Description
FJ492271	5" Interface Pad
FJ492212	6" Interface Pad

ORBITAL SANDER ACCESSORIES
FESTOOL

Festool 5" & 6" Polishing Sponge Pads

- For use with Festool RO 125 FEQ and RO 150 FEQ only
- Coarse polishing sponge for heavily weathered surfaces
- Fine polishing sponge for lightly weathered surfaces
- Coarse sponge pad dimensions: 6" diameter, 20mm high
- Fine sponge pad dimensions: 5"or 6" diameter, 30mm high

Packing & Sold In: As shown below.

Item#	Description	Diameter	Fits Tool	Qty
FJ493865	Fine	5"	RO 125 FEQ	Pack of 5
FJ493866	Fine	6"	RO 150 FEQ	1
FJ493845	Coarse	6"	RO 150 FEQ	1
FJ488346	Coarse	6"	RO 150 FEQ	Pack of 5

ORBITAL SANDER ACCESSORIES
3M

5" Low Profile Stikit Pad

- For use with 5" Stikit discs
- Has a blunt 15 degree taper on the pad edge for durability and improved leveling of sanded surface
- Blue face pad allows for easy disc removal in low heat applications
- Size: 5" x 3/8"
- Thread: 5/16"-24 external

Packing: As shown below.
Sold In: Both broken and full box quantities. Discount available for full box orders.

Item#	Color	RPM	Box Qty
MM5555	Blue	12,000	10

ORBITAL SANDER ACCESSORIES
5" Sander Pads

FESTOOL

- 5" diameter non-vacuum disc pad, hook-face, medium nap
- 5/8" thickness urethane, soft density, 5/16"-24 male thread
- Maximum operating speed: 13,000 RPM
- Ideal for use with scalloped edge abrasives
- For use with random orbit sanders, 5/16" -24 female thread

Packing & Sold In: Each

Item#	Description
DY57792	5" Replacement Pads for Non-Vaccum Orbital Sanders

ORBITAL SANDER ACCESSORIES
Bosch 5" x 8 Hole Sander Disc Pads

BOSCH

Packing & Sold In: Each

Item#	Description	Fits Tools
BLRS030	5" x 8 Hole, Contour, Hook & Loop Extra Soft	BL1295D, BL3107DVS, BL3725DVS
BLRS031	5" x 8 Hole, Standard, Hook & Loop	BL1295D, BL3107DVS, BL3725DVS

ORBITAL SANDER ACCESSORIES
5" & 6" Sanding Pads

DYNABRADE

- 5/16" – 24 Male thread
- 13,000 RPM maximum operating speed

Packing & Sold In: Each

Item#	Type	Holes	Thickness	Density	Item#	Type	Holes	Thickness	Density
5" Vinyl Face Pads for PSA Discs					**6" Vinyl Face Pads for PSA Discs**				
DY56102	Non-Vac	-	3/8"	Soft	DY56107	Non-Vac	-	3/8"	Medium
DY56106	Non-Vac	-	3/8"	Medium	DY56177	Non-Vac	-	5/8"	Medium
DY56175	Non-Vac	-	5/8"	Medium	DY56105	Vac	6	3/8"	Medium
DY56104	Vac	5	3/8"	Medium	-	-	-	-	-
DY56176	Vac	5	5/8"	Medium	-	-	-	-	-
5" Hook Face Pads for Hook/Loop Discs					**6" Hook Face Pads for Hook/Loop Discs**				
DY54325	Non-Vac	-	3/8"	Medium	DY54327	Non-Vac	-	3/8"	Medium
DY54326	Vac	5	3/8"	Medium	DY54328	Vac	6	3/8"	Medium

ORBITAL SANDER ACCESSORIES
5" & 6" Multi Hole Grip Faced Vacuum Backup Pad

MIRKA

A - MA915GV

B - MA916GV

- Medium backup pads for 5" & 6" grip or hook and loop sanding discs
- 5/16" – 24 mounting thread
- 5" diameter, 44 hole
- 6" diameter, 51 hole

Packing: MA915GV (10) per box, MA916GV (5) per box.
Sold in: Both broken and full box quantities. Discount available for full box orders.

	Item#	Description
A	MA915GV	5" Grip Faced Vacuum Backup Pad
B	MA916GV	6" Grip Faced Vacuum Backup Pad

ORBITAL SANDER ACCESSORIES
Porter Cable 5" & 6" Disc Pads

PORTER CABLE

- 3/4" thick
- Contour pads

Packing & Sold In: Each

Item#	Type	Size	Hole Pattern	Fits Tool
RK13700	PSA	5"	No Hole	7334, 7335
RK13900	PSA	5"	No Hole	332
RK13901	PSA	5"	5 Hole	333, 334
RK13904	Hook/Loop	5"	5 Hole	333, 334
RK14700	PSA	5"	5 Hole	7334, 7335
RK16000	PSA	6"	No Hole	7336

ORBITAL SANDER ACCESSORIES
Festool Stickfix Sanding 5" & 6" Pads

FESTOOL

- 9 hole hook and loop sanding pads
- Stickfix hard pads help maintain a crisp and flat surface, especially on edges
- Stickfix soft pads are high temperature resistant for heavy duty applications
- Stickfix super soft pads are more forgiving and allow abrasive to float easier on the surface for smoother results; for medium/fine sanding and finishing

Packing & Sold In: Each

A - FJ492127 **B** - FJ492125

C - FJ492280
E - FJ492282



D - FJ492126

F - FJ493915

G - FJ484850



H - FJ493916

I - FJ486381

J - FJ493917

K - FJ486382

	Item#	Type	Size	Fits Festool		Item#	Type	Size	Fits Festool
A	FJ492127	Hard	5"	RO 125 FEQ	G	FJ484850	Hard	6"	ETS 150/3 EQ, ETS 150/5 EQ
B	FJ492125	Soft	5"	RO 125 FEQ	H	FJ493916	Soft	6"	RO 150 FEQ
C	FJ492280	Soft	5"	ETS 125 EQ	I	FJ486381	Soft	6"	ETS 150/3 EQ, ETS 150/5 EQ
D	FJ492126	Super Soft	5"	RO 125 FEQ	J	FJ493917	Super Soft	6"	RO 150 FEQ
E	FJ492282	Super Soft	5"	ETS 125 EQ	K	FJ486382	Super Soft	6"	ETS 150/3 EQ, ETS 150/5 EQ
F	FJ493915	Hard	6"	RO 150 FEQ					

ORBITAL SANDER ACCESSORIES
5" & 6" Sanding Pads

WÜRTH

- Backup pads for use with random orbital or oscillating sanders

Packing & Sold In: Each

Item#	Size	Holes
PSA (PRESSURE SENSITIVE ADHESIVE)		
WW8521125010961	5"	-
WW8521125020961	5"	5
WW8521150010961	6"	-
WW8521150011961	6"	6
HOOK & LOOP		
WW8521125110961	5"	-
WW8521125116961	5"	5
WW8521125117961	5"	Multi-Hole
WW8521150110961	6"	-
WW8521150111961	6"	6
WW8521120117961	6"	Multi-Hole

ORBITAL SANDER ACCESSORIES
6" Round Sanding Pads



- For use with Fein MF 636 6" Orbital Sander
- FI636R06-SPE peel and stick to sanding pad after removing old element
- FI636T-HLPD place this pad between the sanding pad and sandpaper for super-soft sanding

Packing & Sold in: Each

Item#	Description
FI636RO6-SP	6" Hook and Loop Backing Pad
FI636RO6-SPE	6" Hook and Loop Replacement Element
FI636T-HLPD	6" Extra Soft Sanding Pad

ORBITAL SANDER ACCESSORIES
8" Sanding Pad

- For use with Fein FI1200
- Perforated with hook and loop
- Hard pad

Packing & Sold In: Each



Item#	Description
FI1200SP	8" Sanding Pad for FI1200

ORBITAL SANDER ACCESSORIES
5" Clean Sanding Low Profile Pad Hookit

- 5" Hookit clean backup pad
- Soft density – use with 5" clean sanding hookit disc of grade 220 and finer
- 11/16" thickness, 40 hole
- 5/16"-24 external thread
- Maximum 12,000 RPM

Packing & Sold In: Each

Item#
MM20290

ORBITAL SANDER ACCESSORIES
5" Clean Sanding Disc Pad Hookit



- 5" Hook saver clean sanding disc
- 44 hole, hook type 2
- Maximum RPM: 12000

Packing & Sold In: Each

Item#
MM20444

ORBITAL SANDER ACCESSORIES
5" Hookit II D/F Disc Pad 3 Bolt Hole

- For use with pre-punched Hookit II D/F Discs to facilitate dust evacuation (5 dust holes Die 500FH)
- 5" diameter, 1/2" thickness
- Thread size 3 bolt holes
- Maximum 12,000 RPM
- Fits Porter Cable model 333 and 334 sander

Packing & Sold In: Each

Item#
MM50202

ORBITAL SANDER ACCESSORIES
5" & 6" Hookit II Low Profile Disc Pads

- MM5245 use with 5" Hookit II discs of grades 220 and finer
- Max RPM: 12,000
- Thread size: 5/16-24 external

Packing: As shown below.

Sold in: Both broken and full box quantities. Discount available for full box orders.

Item#	Diameter	Thickness	Description	Box Qty
MM5245	5"	11/16"	Finishing Disc Pad	10
MM5275	5"	3/4"	Medium Density Disc Pad	10
MM5276	6"	3/4"	Medium Density Disc Pad	10

ORBITAL SANDER ACCESSORIES
5" Clean Sanding Low Profile Pad Hookit

- 5" Hookit clean backup pad
- 3/8" thickness, 44 hole
- 5/16"-24 external thread

Packing & Sold In: Each

Item#
MM20353

ORBITAL SANDER ACCESSORIES
6" Clean Sanding Low Profile Pad Hookit

- 6" Hookit clean backup pad
- 3/8" thickness, 52 hole
- 5/16"-24 external thread

Packing & Sold In: Each

Item#
MM20356

ORBITAL SANDER ACCESSORIES
8" Hookit II Disc Pad 5 Bolt Hole

- Medium density replacement pad for National Detroit 900 and Dynabrade 57700
- 8" diameter, 3/8" thickness
- Thread size 5 bolt holes
- Maximum 5,000 RPM

Packing & Sold In: Each

Item#
MM5281

ORBITAL SANDER ACCESSORIES
Gem Drive Pad with Hookit II

- Gem 11" drive pad with Hookit II

Packing & Sold In: Each

Item#	Description
GS515C	11" Drive Pad w/Hookit II
GS51SCH	11" Drive Pad w/Hook & Loop

ORBITAL SANDER ACCESSORIES
MIRKA

Abranet Grip Faced 1/4" Pad Protectors

- Available in 3", 5" & 6" diameters
- 1/4" thickness

Packing & Sold In: As shown below.

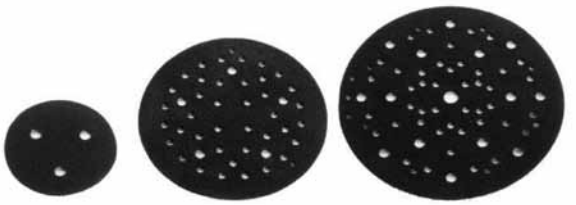

A - MA9947 **B** - MA9955 **C** - MA9956

	Item#	Description	Box Qty
A	MA9947	3" Abranet Grip Faced Pad Protector	1
B	MA9955	5" Abranet Grip Faced Pad Protector	5
C	MA9956	6" Abranet Grip Faced Pad Protector	5

ORBITAL SANDER ACCESSORIES
MIRKA

Mirka 5" Abranet Grip Faced Vacuum Backup Pad

A - MA105GVBD

B - MA105GVPC

- Abranet 3 hole grip faced vacuum backup pad
- BD converts Black and Decker and Dewalt 5" sanders to grip Abranet abrasives
- PC converts Porter Cable 5" sanders to grip Abranet abrasives

Packing & Sold In: Each

	Item#	Description
A	MA105GVBD	5" Abranet Grip Faced Black & Decker Backup Pad
B	MA105GVPC	5" Abranet Grip Faced Porter Cable Backup Pad

ORBITAL SANDER ACCESSORIES
3M

Conversion Pads to Hookit II

- Converts an existing Hookit or Stikit pad to a Hookit II disc pad
- Can be used for applications where the existing disc pad accessories are designed for the Hookit II
- Conversion pads are also available with Scotchbrite material with Hookit and Hookit II backup pads

Packing: As shown below.

Sold in: Both broken and full box quantities. Discount available for full box orders.

Item#	Description	Size	Box Qty
MM2327	No Holes – Hookit to Hookit II	5"	10
MM2329	No Holes – Hookit to Hookit II	6"	10
MM2331	No Holes – Stikit to Hookit II	5"	10

ORBITAL SANDER ACCESSORIES
Gem Industries, Inc.

Gem Hookit Conversion Pad

- 11" Hookit conversion pad

Packing & Sold In: Each

Item#	Description
GS111	11" Hookit™ Conversion Pad

BELT SANDER
2-1/2" x 14", No Dust Bag

- Porter Cable model #: 371K
- Rubber grip provides comfortable non-slip surface
- Flush side enables sanding up to perpendicular surface
- Dust sealed, recessed switch offers accessibility while minimizing unintended turn-offs
- Removable auxiliary handle offers better control when two-handed use is desired
- Removable dust port for passive dust collection
- Power: 120VAC
- Amps: 5
- SFPM: 1,100
- Belt Size: 2-1/2" x 14"
- Dimensions: 17" L x 4.5" W x 5.5" H
- Weight: 5 lb.
- Includes: (3) 80 grit belts, dust port, removable auxiliary handle, and carrying case

Packing & Sold In: Each

Item#	Description
RK371K	Compact Belt Sander

BELT SANDER
3" x 21" Variable Speed With Dust Bag

- Porter Cable model #: 352VS
- Variable-speed dial 850-1,300 SFPM
- Designed for flush sanding up to vertical surfaces
- Dust bag swivels 360 degrees
- Fingertip belt-tracking knob
- Quick-release belt change lever
- Motor is located over platen for maximum performance and balance
- Power: 120VAC, 25-60Hz
- Amps: 8
- SFPM: 850 - 1,300
- Belt Size: 3" x 21"
- Dimensions: 12.5" L x 5.75" W x 10.38" H
- Weight: 10.75 lb.

Packing & Sold In: Each

Item#	Description
RK352VS	Variable Speed Belt Sander with Dust Bag

BELT SANDER
3" x 21" Belt, Variable Speed With Dust Bag

- Bosch model #: 1274DVS
- Lightweight model designed for both vertical and horizontal applications
- Variable speed dial allows matching belt speed for work
- 16' cord for extended range of operation
- Motor: 6.6 amps
- Belt Speed: 550 to 1,100 SFPM
- Weight: 7.1 lb.

Packing & Sold In: Each

Item#	Description
BL1274DVS	3" x 21" Belt Sander with Dust Bag

BELT SANDER
3" x 24", With & Without Dust Bag

- Porter Cable model #'s: 361 & 360
- Motor is located over platen for maximum performance and balance
- Quick-release belt change lever
- Fingertip belt-tracking knob for quick, accurate belt adjustments
- Large capacity dust collection bag swivels 360 degrees (RK360)
- Power: 120VAC, 25-60HZ
- Amps: 12
- SFPM: 1,500
- Belt Size: 3" x 24"
- Dimensions: 14"L x 11.25"W x 9.75"H (RK361), 20"L x 7"W x 8"H (RK360)
- Weight: 13.75 lb. (RK361), 14.5 lb. (RK360)

Packing & Sold In: Each

RK361

RK360

Item#	Description
RK361	Belt Sander
RK360	Belt Sander with Dust Bag

BELT SANDER
3" x 24" Belt, Variable Speed With Dust Bag

- Porter Cable model #: 360VS
- Variable-speed dial is located on handle, allowing belt speed adjustment from 1,000 to 1,500 SFPM
- Motor is located over platen for max. performance & balance
- Quick-release belt change lever
- Fingertip belt-tracking knob for accurate belt adjustments
- Large capacity dust collection bag
- Power: 120VAC, 60HZ
- Amps: 12
- SFPM: 1,000 – 1,500
- Belt Size: 3" x 24"
- Dimensions: 20"L x 7"W x 8"H
- Weight: 14.5 lb.

Packing & Sold In: Each

Item#	Description
RK360VS	Variable Speed Belt Sander With Dust Bag

BELT SANDER
4" x 24" Belt, Single Speed With Dust Bag

- Porter Cable model #: 362
- Features fingertip belt tracking knob for quick, accurate belt adjustment and quick release belt change lever
- Large capacity dust collection bag that has 360 degree swivel
- Motor: 12 amps
- Belt Speed: 1,500 SFPM
- Weight: 15.5 lb.

Packing & Sold In: Each

Item#	Description
RK362	Belt Sander w/ Dust Bag

BELT SANDER
4" x 24" Belt, Single & Variable Speed With Dust Bag

- Bosch model #'s: 1276D and 1276DVS
- Rugged design
- Adjustable front handle that can be folded
- Motor: 10.5 amps
- Single Belt Speed: 1,550 SFPM
- Variable Speed Belt: 1,150 to 1,550 SFPM
- Weight: 12.0 lb.
- Length: 13.8"

Packing & Sold In: Each

Item#	Description
BL1276D	Single Speed with Dust Bag
BL1276DVS	Variable Speed with Dust Bag

BELT SANDER ACCESSORIES
Replacement Belts For RK371K Belt Sander

Packing & Sold In: 1 pack of 5 belts

Item#	Description
RK1501	60 grit 2-1/2" x 14" Belt
RK1502	80 grit 2-1/2" x 14" Belt
RK1503	100 grit 2-1/2" x 14" Belt
RK1504	120 grit 2-1/2" x 14" Belt
RK1505	180 grit 2-1/2" x 14" Belt

BELT SANDER ACCESSORIES
Service Parts for Belt Sanders

Packing & Sold In: Each

Item#	Description	Model
RK824216	Carbon Brush	500 Series
RK849317	Switch	350 Series
RK875697	Cord	350 Series
RK802787	Cord	691, 6911, 6912, 724-726, & 736

BELT SANDER ACCESSORIES
Belt Sander Shoes

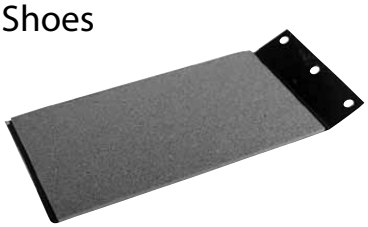

Item#	Description	Use With Model
BL2-610-908-624	Metal Shoe	1275DVS
BL2-610-908-625	Metal Shoe	1276D, 1276DVS
BL3-601-010-509	Graphite Shoe	1276D, 1276DVS

BELT SANDER ACCESSORIES
Cork/Metal Shoes & Dust Bags

Packing & Sold In: Each

Item#	For Use With
CORK SHOES	
RK839040	350 Series, 500 Series, 360 Series (3" Wide)
RK804204	360 Series (4" Wide)
METAL SHOES	
RK903400	350 Series
RK908909	360 Series (4" Wide)
RK908910	360 Series (3" wide)
DUST BAGS	
RK692639	350 Series, 360 Series, 500 Series

COVING SANDER, AIR POWERED

- Betterly model #: 300
- Easy one hand operation - weighs less than 2 lb.
- "Locking" pad mounting system for maximum sanding efficiency
- Uses convenient, readily available 4-1/2" x 30' rolls of adhesive-backed sand paper
- Air consumption: 4 CFM at 85 psi
- Includes: Coving pad, flat pad, soft contour pad and 6-1/2 foot flexible air hose

Packing & Sold In: Each

Item#	Description
BY300	Coving Sander

FINISHING TOOL, AIR POWERED
DYNABRADE

Dynafine Backsplash Sander Versatility Kit

- For fabricating solid surface coved backsplashes and ideal for cleaning metal edges and corners
- Air motor features 1/32" diameter orbital action for achieving a superior finish
- Low profile housing allows easy access in hard-to-reach areas
- Handle is offset 7 Degree for greater operator comfort and control
- Includes tool, an assortment of PSA abrasives, and five sanding pads (58020) 1/4" radius, (58021) 3/8" radius, (58022) 1/2" radius, (58023) 5/8" radius, (58024) 3/4" reverse radius
- .12 HP
- 7 Degree offset
- 15,000 RPM
- 1/32" (0.8 mm) Dia. orbit
- Rear exhaust
- Max air flow at 90 PSIG: 20
- Weight: 2.18 lb.
- Dimensions: 3-3/4"H x 9"L

Packing & Sold In: Each

Item#
DY58010

FINISHING TOOL, AIR POWERED
DYNABRADE

Lightweight Dyninger

- For use with Spindle-Mount, Arbor-Mount and Eyelet Sanding Stars
- Mount 4" diameter spindle-mount abrasive sanding stars with 1/4" shank, or Eyelet Dy-Cut sanding stars
- Excellent for use on wooden parts, moldings, raised panels and intricate profiles
- Eliminates raised grain and removes loose fibers when whitewood sanding as well as scuffing sealer coats
- Includes 94407 Air-Flow Control Dynaswivel fitting for maximum tool maneuverability and control
- .4 HP
- Straight-Line
- 0-3,200 RPM
- Rear exhaust
- 1/4" Collet
- Max air flow at 90 PSIG: 22
- Weight: 1.87 lb.
- Dimensions: 1-5/8"H x 9-1/4"L

Packing & Sold In: Each

Item#
DY52050

DETAIL SANDER, ELECTRIC POWERED
FESTOOL

- Festool model #: DX93E
- Ideal for sanding edges, surfaces, and corners in a single operation
- For use on wooden staircases, parquet floors, etc.
- Full-area sanding into every corner through orbital sanding motion
- Sanding stroke of 2.5 mm guarantees above average material removal
- Integrated dust extractor port
- Step-less electronic speed control for various uses
- StickFix® (Hook and Loop) sanding system for fast replacement of sanding pad and abrasives
- 150 watts/1.3 amps 120v AC
- 5,000 - 9,500 opm
- Includes: StickFix® (Hook and Loop) 93 V sanding pad 3-11/16" (93 mm, soft, 488715), (1) abrasive sheet, Flat sanding pad (488036), In Systainer 2

Packing & Sold In: Each

Item#
FJ567738

LINEAR SANDER, ELECTRIC POWERED
FESTOOL

3-5/32" x 5-1/4" Pad, Dust Collector

- Festool model #: LS 130 EQ
- Stickfix (hook and loop) sanding system for fast replacement of sanding pad and abrasives
- Wide range of pads can be mounted for any application
- Tool-less pad design
- Integrated dust extraction with variable speed and lockable trigger
- Speed: 4,000 – 6,000 opm
- Sanding Stroke: 5/32"
- Weight: 3.94 lb.
- Power Consumption: 120VAC
- Amps: 2.2
- Watts: 260
- Accessories included: 90 degree sanding pad, abrasive sheet, Plug-it power cord, Stickfix sanding pad - flat, In Systainer 1 (445433)

Packing & Sold In: Each

Item#	Description
FJ567777	Duplex Linear Sander Dust Collector

DUST EXTRACTORS
Large Capacity

FESTOOL

- Festool model #: CT 22 & CT 33
- For non-hazardous dusts
- HEPA filter elements filter down to 0.3 micron
- Larger wheels provide stability and ease of movement
- Locking brake on rear wheels means no accidental movement of the dust extractor
- Large flat area for tools or Systainer stacking
- Tool-triggered or manual on-off switch with smooth start up and shut off delay
- Replaceable filter bag
- Step-less electronic suction control
- Wet and dry extraction with no complicated conversion
- Integrated cleaning device (scratcher) cleans the filter in the blink of an eye
- Blower port
- Standard antistatic equipment protects against electrostatic charging
- Power: 350-1200 watts; 2.9-10 amps 120v AC
- Includes: (1) fitted filter bag (452971), (1) antistatic suction hose 1" x 11.5' (27 mm x 3.5 m, 452878) and HEPA filters

Packing & Sold In: Each

FJ583366

FJ583368

Item#	Container Capacity
FJ583366	5.8 Gallons
FJ583368	8.7 Gallons

DUST EXTRACTORS
Portable, Mobile

FESTOOL

- Festool model #: CT MIDI & CT MINI
- Tool-Triggered or manual activation. With smooth start up and shut off delay
- Compact dimensions and light weight
- Remarkable dust extraction capability. Keeps your work area clean and the air you breathe dust-free
- Simple wet to dry conversion
- On-board hose and cord management
- Adjustable power/ suction settings
- Quiet running
- Antistatic design prevents electrostatic charging
- Power: 400-1200 watts; 3.3-10 amps 120v AC
- Includes: (2) replacement filter bags, (1) antistatic suction hose 1-1/16" x 11.5' (27mm x 3.5mm) and (1) micron filter

Packing & Sold In: Each

FJ583360

FJ583376

Item#	Container Capacity
FJ583360	2.6 Gallons
FJ583376	3.96 Gallons

DUST EXTRACTOR
Wet/Dry

- Vacuum delivers 99.85% filtration efficiency - great for fine particulate pick-up, like drywall or solid-surface dust
- Built-in outlet for use with power tools - vacuum starts automatically when tool is turned on
- Includes 15 second vacuum overrun to clear hose when tool is turned off
- 25' cord
- Dual filtration system with washable automotive-type paper filter and 2-ply ten-gallon paper filter bag for dust pick-up
- Corrosion resistant polypropylene tank
- Large wheels for easy maneuvering
- Convenient flat top surface tray for holding tools while working
- Includes: Vacuum, hose, and operating manual
- Power: 120 VAC, 25 - 60 Hz.
- Motor Amps: 9 (alone), 15 (with tools)
- Air Volume: 114 cu. ft./min.
- Vacuum Water Lift/in.: 94
- Liquid Capacity: 10 gal.
- Solids Capacity: 10 gal.
- Bag Capacity: 10 gal.
- Size: 19"L x 14" W x 23-1/2"H

Packing & Sold In: Each

Item#
RK7812

DUST EXTRACTOR
Fein Turbo II

- For use with random orbit sanders
- Dual fan turbo cooling system extends motor life
- Can be used wet or dry
- Tools switch turns the dust extractor on and off and provides a 10 second delay after shutoff to clear the hose
- Air Flow: 116 cfm
- Power Cord Length: 16 ft.
- Hose Dimensions: 16'L, 1-1/4" diameter
- Capacity Dry: 9 gallons
- Capacity Wet: 6.8 gallons
- FI913036A01 Replacement Dust Bags

Packing & Sold In: Each

Item#
FI95513

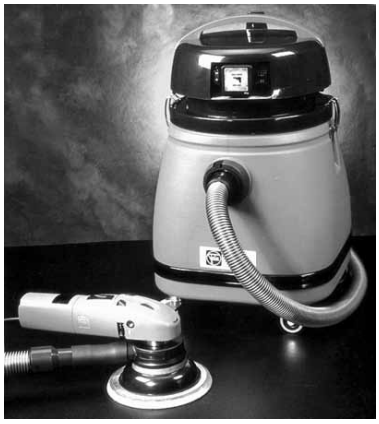

DUST EXTRACTOR ACCESSORIES
For Porter Cable Dust Extractors

- 2-ply filter bags

Packing & Sold In: 3 bags per pack.

RK78114

RK78121

Item#	For Porter Cable Model	Capacity
RK78114	7810	5 Gallon
RK78121	7812	10 Gallon

DUST EXTRACTOR ACCESSORIES
For Fein Dust Extractors

Packing & Sold In: Pack of 3 disposable dust bag

Item#	Fits
FI636RO6-DB	Old Style Fein Vac 1
FI913036K01	Fein Turbo II

DUST EXTRACTOR ACCESSORIES

For Festool CT Series Dust Extractors

FESTOOL

Packing & Sold In: Each

	Description	Item#
A	**COMPACT CLEANING SET** • Docked to your CT Dust Extractors for quick and easy access • Rigid, lightweight and crack resistant polypropylene tubes and nozzles • Includes: (1) Systainer 1 (FJ445433) (1) 36mm Polyproplyene curved hand tube (FJ452901) (3 pcs.) 36mm Polyproplyene extension tube (FJ452903) (1) 36mm Polyproplyene interchangeable floor nozzle (FJ452906) (1) 36mm Polyproplyene crevice nozzle (FJ452904) (1) 36mm Polyproplyene upholstery nozzle (FJ440406) NOTE: Compatible with CT22, CT33, CT MINI and CT MIDI.	FJ456736
B	**UNIVERSAL CLEANING SET** • General purpose cleaning set • Includes: (1) Systainer 4 (FJ445597) (1) 36mm Polyproplyene Non-antistatic hose (11.5') length (FJ452882) (1) 36mm Polyproplyene curved hand tube (FJ452901) (3 pcs.) 36mm Polyproplyene extension tubes (FJ452903) (1) 36mm Polyproplyene standard floor nozzle (FJ452907) (1) 36mm Polyproplyene crevice nozzle (FJ452904) (1) 36mm Polyproplyene upholstery nozzle (FJ440406) (1) 36mm Polyproplyene suction brush (FJ440404) NOTE: Compatible with CT22 and CT33 only.	FJ454769
C	**TRADESPERSON/INSTALLER CLEANING SET** • Ideal for clean-up on the jobsite, especially if residential • Includes: Systainer 4 (FJ445597) (1) 36mm Polyproplyene antistatic hose 3.5m (11.5') length (FJ452882) (1) 36mm Polyproplyene curved hand tube (FJ452900) (3 pcs.) 36mm Polyproplyene extension tube (FJ452902) (1) 36mm Polyproplyene multipurpose floor nozzle (FJ452911) (1) 36mm Polyproplyene crevice nozzle (FJ452904) (1) 36mm Polyproplyene upholstery nozzle (FJ440406) (1) 36mm Polyproplyene suction brush (FJ440404) NOTE: Compatible with CT22 and CT33 only.	FJ454766
D	**WORKSHOP CLEANING SET** • Heavy duty cleanup set for commercial or home shop use • Includes: (1) Systainer 4 (FJ445597) (1) 36mm Polyproplyene antistatic hose (11.5') length (452882) (1) 36mm Polyproplyene stainless steel curved hand tube (FJ452900) (3 pcs.) 36mm Polyproplyene extension tube (452902) (1) 36mm Polyproplyene aluminum industrial floor nozzle (452908) NOTE: Compatible with CT22 and CT33 only.	FJ454767
E	**INDUSTRIAL CLEANING SET** • Large diameter tubes and hose to pick up large debris • Includes: Cardboard box (1) 50mm Polypropylene Non-antistatic hose 2.5m (8.25') length (FJ452887) (1) 50mm Polypropylene extension tube (FJ440412) (2 pcs.) 50mm Polypropylene workshop floor nozzle (FJ452909) (1) 50mm Polypropylene square nozzle (FJ440416) (1) 50mm Polypropylene large crevice nozzle (FJ452912) (1) 50mm Polypropylene suction brush (FJ440419) NOTE: Compatible with CT22 and CT33 only.	FJ454770

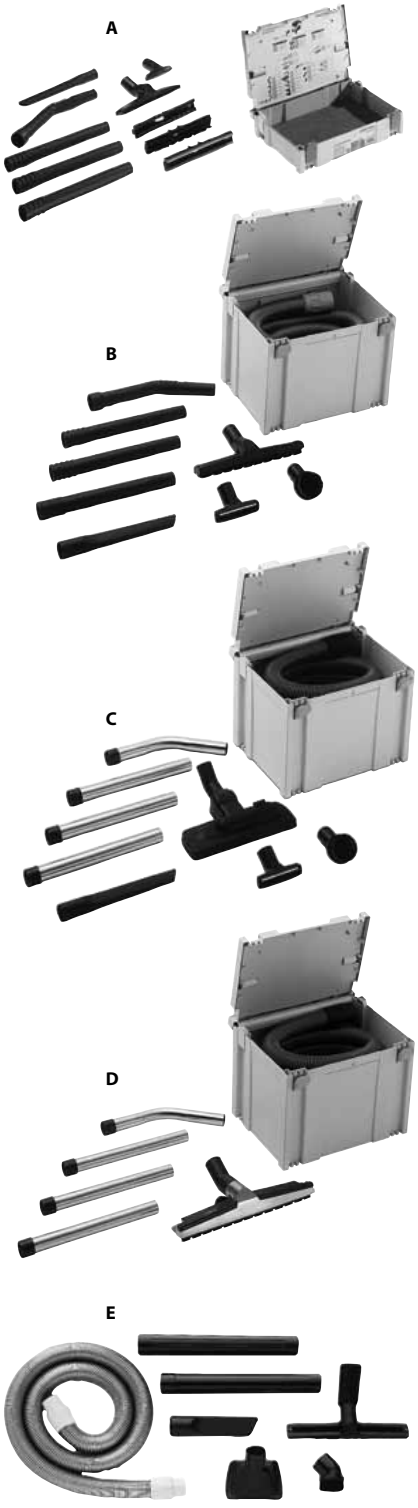

DUST EXTRACTOR ACCESSORIES

For Festool CT Series Dust Extractors

Packing & Sold In: Each

	Description	Item#
A	**ANTISTATIC HOSES** • Rotating connector (extractor end) • Reducing sleeve (tool end) • Antistatic properties reduce shocks	
	1-16" x 16.5' (27mm x 5m) Compatible with CT22, CT33, CT MINI and CT MIDI	FJ452880
	1-7/16" x 11.53' (36mm x 3.5m) Compatible with CT22 and CT33 only	FJ452882
	1-15/16" x 13' (50mm x 4m) Compatible with CT22 and CT33 only	FJ452890
B	**HOSE SLEEVES - ROTATING CONNECTORS** • For use with antistatic extractor end hoses • Antistatic version for D 50mm suction hose NOTE: Compatible with CT22 & CT33 Dust Extractors.	FJ452896
C	**HOSE SLEEVES - ROTATING ADAPTER** • For tool end of hoses or use with cleaning sets, tubes, nozzles and brushes • With rotating adapter for D27mm suction hose • Tool end of extraction hose for standard 27mm hose NOTE: Compatible with CT22, CT33, CT MINI and CT MIDI Dust Extractors.	FJ487071
D	**HOSE SLEEVES - CONNECTOR SLEEVE** • For tool end of hoses or use with cleaning sets, tubes, nozzles and brushes. • Connects suction hoses D 50mm/D36mm/D27mm • Connects rotating connector (extractor ends) together • Taper fit NOTE: Compatible with CT22 & CT33 Dust Extractors.	FJ493047
E	**HOSE SLEEVES - ANTISTATIC Y-PIECE WITH BLANKING PLUG** • For tool end of hoses or use with cleaning sets, tubes, nozzles and brushes • Connects two suction hoses to the dust extractor • Includes blanking plug to cap off unused inlet NOTE: Compatible with CT22 & CT33 Dust Extractors.	FJ452898
F	**TUBES - NON-ANTISTATIC POLYPROPYLENE** • Rigid, lightweight and crack resistant • 3 pieces • 37-1/2" (L=950mm) D 36mm NOTE: Compatible with CT22, CT33, CT MINI and CT MIDI Dust Extractors.	FJ452903
G	**NOZZLES - UPHOLSTERY BRUSH** • Plastic, brush ring • 4-11/16" x 1-5/8 (120 x 40mm) • Fits 27 and 36 mm hose an tubes NOTE: Compatible with CT22, CT33, CT MINI and CT MIDI Dust Extractors.	FJ440406

FESTOOL

DUST EXTRACTOR ACCESSORIES
For Festool CT Series Dust Extractors

Packing & Sold In: Each

	Description	Item#
A	**HANDLE** • Improves mobility of extractor • Provides mounting space for air service unit and boom arm NOTE: Compatible with CT22 & CT33 Dust Extractors.	FJ452921
B	**SUCTION HOSE HOLDER** • Raises hose to table height and prevents trip hazard NOTE: Compatible with CT22 & CT33 Dust Extractors.	FJ452896
C	**HOSE HOOK** • Allows for hose to be wound and stored on the front of the CT Dust Extractor NOTE: Compatible with CT22 & CT33 Dust Extractors.	FJ452998
D	**CT ADAPTER PLUG** • Replacement CT Adaptor Plug • Adapts the 20 amp CT plug to fit in standard 15 amp outlets NOTE: Compatible with CT22, CT33, CT MINI and CT MIDI Dust Extractors.	FJ493232
E	**BOOM ARM** • Keeps the cord and hose up and out of the way • Requires handle FJ452921 (452921) to be mounted on the dust extractor NOTE: Compatible with CT22 & CT33 Dust Extractors.	FJ492753
F	**CT HOSE GARAGE** • For Festool CT 22 and CT 33 Dust Extractors • Stores and protects hose and cord for transport • Extends Sys-Doc feature for systainers NOTE: Compatible with CT22 & CT33 Dust Extractors.	FJ494388
G	**WET FILTER ELEMENT** • Helps to prevent foam buildup associated with wet extraction	
	2 pieces (Use with CT22 & CT33 Dust Extractors)	FJ452924
	1 Piece (Use with CTMIDI and CTMNI Dust Extractors)	FJ456805
H	**HEPA FILTER ELEMENT** • HEPA filter element filters to .3 microns NOTE: Compatible with CT22 & CT33 Dust Extractors.	FJ493334

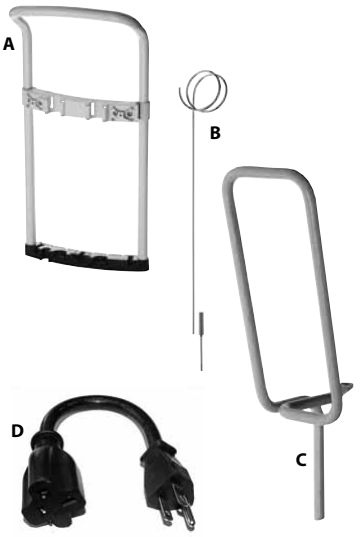



DUST EXTRACTOR ACCESSORIES

For Festool CT Series Dust Extractors

Packing & Sold In: Each

	Description	Item#
I	**FILTER BAGS** • Spun bound filter bag • Tear resistant polyester fleece • Filters particles to 5 microns • Integrated flap to close bag	
	5 Bags (For use with CT MINI Dust Extractor only.)	FJ456772
	5 Bags (For use with CT MIDI Dust Extractor only.)	FJ494105
	20 Bags (For use with CT 22E Dust Extractor only.)	FJ494631
J	**FILTER BAGS** • Spun bound filter bag • Tear resistant polyester fleece • Filters particles to 5 microns • Integrated flap to close bag • Includes dust cap	
	5 Bags (For use with CT 22E Dust Extractor only.)	FJ452970
	5 Bags (For use with CT 33 Dust Extractor only.)	FJ452971
K	**LONG LIFE FILTER BAGS** • Reusable bags - at least 500 fillings • Re-sealable NOTE: For use with CT 33 E Dust Extractor only.	FJ456738
L	**ANTISTATIC HOSES** • Combines air supply, exhaust air and dust extraction in a single hose • Tool-side rotator connector to prevent twisting • Extremely flexible, tough, non-marring NOTE: For use with CT 33 Mobile Dust Extractor only.	
	16'4 hose length	FJ488176
	22.9' hose length	FJ488131
M	**DOUBLE ADAPTER FOR ANTISTATIC HOSES** • To run 2 air tools on 1 CT Dust Extractor • Requires the use of FJ454758 (454725) adapter NOTE: For use with FJ488176 and FJU488131 (IAS 2) only.	FJ454758
N	**ADAPTER FOR ANTISTATIC HOSES** • For the IAS 2 hose for general cleaning tasks • Prevents damage to tools and hose that may result if the IAS 2 Hose is used for dust extraction without this adapter NOTE: For use with FJ488176 and FJU488131 (IAS 2) only.	FJ488418

I

J

K

L

M

N

PORTABLE AIR HAMMER

DANAIR INC.

- For use on T-moulding
- Operating pressure 60-125 psi; air consumption 2-4 CFM
- Delivers 1,000 blows per minute
- Versatile, interchangeable tips of super-soft to hard plastic, steel and aluminum, diameter of 1-1/2" (1 medium tip included)
- Palm size; lightweight

Packing & Sold In: Each

Item#
DAAH15M

BLOW GUN
In-Line Blow Gun

DYNABRADE

- Clean off work surfaces without disconnecting
- Only connect once; permanently mounts between coupler and air hose to purge air line of water and contaminants before starting up air tools
- Durable aluminum construction, weighs only 2 oz. (0.06 kg)
- Meets O.S.H.A. requirements of special relief hole in nozzle which limits pressure to 30 PSIG (2 Bar) when dead ended and used on an air line of 150 PSIG (10.3 Bar) or less

Packing & Sold In: Each

Item#
DY94467

BLOW GUN
Full Flow Safety Lever

MILTON

- Meets OSHA requirements of special relief holes in nozzle which limits pressure to 30 PSI when dead ended (static pressure)
- Maximum working pressure: 150 PSI
- SCFM 10.0 @ 100 PSI
- 1/4" NPT air inlet, nozzle thread size: 7/16"-27
- Body outlet thread size 1/2"-27

Packing & Sold In: Each

Item#
MF150

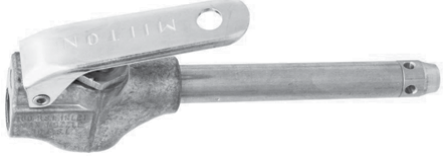

BLOW GUN
Plastic

WÜRTH

- Ideal for vertical installations
- Noise reduced, meets OSHA
- Maximum working pressure 175 psi, 1/4" NPY inlet connection

Packing: As shown below.
Sold In: Both broken and full box quantities.
Discount available for full box orders.

Item#	Box Qty
WW7149234	24

BLOW GUN
Safety Blo-Gun with Extensions

MILTON

- Four safety by-pass holes allow air to escape if tip-hole is blocked
- By-pass holes do not interfere with normal air flow
- Special internal design permits a restricted maximum discharge of 30 psi
- Discharges same air volume as full flow blo-guns, while maintaining required noise level and nozzle pressure
- Maximum inlet pressure: 150 psi
- 1/4" NPT air inlet, nozzle thread 1/2"-27
- Zinc alloy body
- OSHA compliant

Packing & Sold In: Each

Item#
MF131



BLOW GUN
Pocket Blo-Gun With Shirt Clip Adjustable Aluminum

MILTON

- Easy grip two finger control to adjust from full volume air flow to complete shut off
- Knurled grip for secure handling even with oily or greasy fingers
- M-style (fits any 1/4" Industrial style coupler)
- Maximum inlet pressure: 150 PSI
- SCFM 15.9 @ 100 PSI

Packing & Sold In: Each

Item#
MF115

CANTEX MILLING MACHINE

COLONIAL SAW
MACHINERY SALES AND SERVICE

- Colonial Saw model Lamello Cantex Ergo
- For flush milling solid wood edges as well as mini-spot patches
- Equipped with the successful Step Memory System for high-precision requirements
- Cutter head with 3 carbide disposable reversing blades
- Milling width 45 mm
- Detachable nylon Platen-Gib on one side ensures problem-free entry into solid wood edges
- Support to protect the milling machine when it is running down or not in use
- Power: 705W
- Voltage: 120/230 V
- Speed: 10,000 rpm
- Cutting width: 45mm
- Cutter head: 3 reversing blades
- Weight: 7.5lb.
- Includes: tool set, wooden case and operating instructions

Packing & Sold In: Each

Item#
LM111857

HEAT GUN
Heavy Duty

BOSCH

- Bosch model # 1942
- For continous duty, industrial applications
- Insulated nozzle allows cool exterior temperature, air intake allows variable temperature adjustments
- Padded adjustable stand
- Rating: 120V
- Amps: 14.3
- Max. Temperature: 1,000° F
- Max. Air Volume: 23 CFM
- Length: 8"
- Weight: 3.5 lb.

Packing & Sold In: Each

Item#	Description
BL1942	Heat Gun
BL3-609-390-504	Replacement Heat Element

STORAGE SYSTEM
FESTOOL
Systainer Port

- Secure, space saving accessible storage of Systainers
- Systainer boxes not included
- Includes: 5 Systainer telescopic drawers and casters
- Dimensions (without wheels): 15-3/4"D x 19-11/16"W x 39-3/8"H

NOTE: For use with Festool® Systainers only.
Packing & Sold In: Each

Item#
FJ491922

STORAGE CONTAINER
FESTOOL
Sortainer Drawer Systems

- Drawer sets latch onto Festool® Systainers and CT Dust extractors
- Same dimensions as the SYS 3 (15-5/8"L x 11-5/8"W x 8"H)
- Drawers and compartments can be configured with insert dividers

NOTE: For use with Festool® Systainers only.
Packing & Sold In: Each

FJ491522
4 Drawer Sortainer

FJ491985
9 Drawer Sortainer

Item#	Description
FJ491522	4 Drawer Sortainer (2 Small Drawers, 1 Med. Drawer & 1 Large Drawer)
FJ491985	9 Drawer Sortainer (6 Small Drawers & 3 Medium Drawers)

STORAGE CONTAINER
FESTOOL
Systainer Cases, Empty

- Strong, flexible, convenient way of storing, carrying and combining tools and accessories
- Creates portable workstations and can be latched to one another
- Stackable

NOTE: For use with FJ491922 (Systainer Port) only.
Packing & Sold In: Each

FJ445596

FJ445597

FJ493283

Item#	Description	Size
FJ445596	SYS 3 Empty Systainer	15-5/8"L x 11-5/8" W x 8"H
FJ445597	SYS 4 Empty Systainer	15-5/8" L x 11-5/8"W x 12"H
FJ493283	SYS 5 Empty Systainer	15-5/8"L x 11-5/8"W x 16"H

STORAGE CONTAINER ACCESSORIES
FESTOOL
Drawer Dividers

- Available in three drawer sizes: small, medium and large

NOTE: For use with Festool® Systainers only.
Packing & Sold In: Each

Item#	Description
FJ491691	Small Drawers, 10 pieces
FJ491692	Medium Drawers, 5 pieces
FJ491693	Large Drawers, 2 pieces

STORAGE CONTAINER ACCESSORIES
FESTOOL
Systainer Cart

- Mobile platform for Systainers
- Maximum load: 110 lb.
- Comes with 4 locking straps

NOTE: For use with Festool® Systainers only.
Packing & Sold In: Each

Item#
FJ492388

PLANER, ELECTRIC POWERED
2-1/4" Width x 0" - 1/8" Depth

- Virutex model #: Edge Lipping Planer AP98
- Designed for flush planing of edges that are added to a board
- Continuous cutting depth adjustment with no minimum increment allows precision flush planing of edges up to 2-1/4", solid surface, hardwood, softwood, laminates & PVC edges
- Non-scratch Teflon coated base slides on the work surface
- Heavy weight to eliminate any vibration
- Horsepower: 1.4
- Motor: 1050 watts
- Voltage: 110v
- Speed: 11,100 rpm
- Removal rate: 1/8" per pass
- Cutting width: 2-1/4"
- Max Cutting depth: 1/8"
- Blades: reversible carbide
- Weight: 17 lb.
- Includes: a set of carbide spare reversible blades

Packing & Sold In: Each

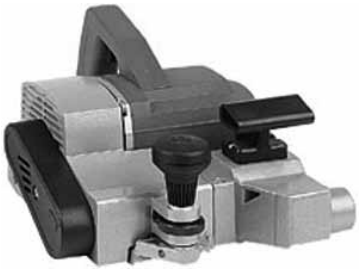

Item#	Description
VXAP98	Edge Lipping Planer
VXAP98B	Replacement Carbide Cutter

PLANER, ELECTRIC POWERED
3-1/4" Width x 0" - 1/8" Depth, Portable

- Freud model #: Avanti FE84K
- Designed to handle beveling, chamfering, rabbeting, and surface planning with ease
- Calibrated depth controls with detents allow for precision depth adjustment
- Power: 7.5 amps
- Voltage: 120v
- Speed: 13,000 rpm
- Speed Control: Electronic
- Cutting width: 3-1/4"
- Max Cutting depth: 1/8"
- Depth control: calibrated with detents
- Blades: reversible carbide
- Weight: 5.4 lb.
- Includes: Reversible Carbide Knives, Blade Wrench, Fence, Rabbeting Depth Stop and Dust Collection Nozzle

Packing & Sold In: Each

Item#	Description
ABFE84K	Portable Paner

PLANER, ELECTRIC POWERED

FESTOOL

3-15/64" Width x 0" - 9/64" Depth

- Festool model #: HL 850 E
- HL 850 lets you cut flush to an adjacent surface because it can plane across the entire width of the rabbet
- Rotary handle depth adjustment with a cut depth up to 9/64"
- Thumb lock depth control
- Converts to a joiner with the addition of a bench unit stand and angle stop
- Near total chip extraction
- Single knife cutter head – spiral, metal carbide
- Unlimited rabbeting depth
- Interchangable heads with quick blade changes
- MMC Electronics equipped with soft-start for no-jolt starts, and constant speed under load
- Motor: 7 amps / 120vac
- Power Consumption: 850 W
- Speed: 10,000 rpm
- Cutting width: 3-15/64"
- Max Cutting Depth: 9/64"
- Blades: Reversible Carbide
- Weight: 8.6 lb.
- Includes: Parallel Guide (484513), Rabbet Depth Guide (484512), Solid Carbide Standard Blade (484575), Standard Planer Head (484520) and Systainer 3 (445596)

Packing & Sold In: Each

Item#
FJ574539

PLANER ACCESSORIES

FESTOOL

NOTE: For use with Festool® HL 850E Planer only.

Packing & Sold In: Each

	Description	Item#
A	**STANDARD BLADE** • For standard, smooth head	FJ484515
B	**BENCH UNIT** • For bench-mounted truing and rebates • Pivoting protective cover, nonskid base, depth-setting ring, locking on/off switch Type: SE-HL • Does not include planer or angle stop • For a complete unit, the angle stop (485018) is required	FJ485017
C	**Clamps** • Traditional screw clamp with head to be used in the bottom continuous T-slot of the guide rails to securely clamp to material • Clamping Thickness: 4-11/16" (120mm)	FJ489570

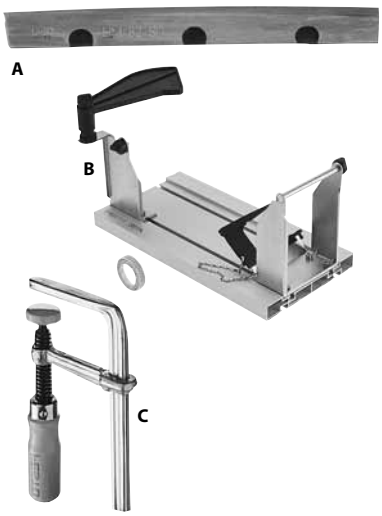

CIRCULAR SAW
FESTOOL
Plunge Cut Design

- Festool model #: TS55EQ
- For solid wood, fine veneer panels, sheet goods-plastic and aluminum
- Quick and easy cutting depth adjustment, cutting depth 2.17"
- Bevel unit allows you to swivel the blade up to 45 degrees on the guide rail for clean cut edges even on bevel cuts
- Detachable Plug-it cord, if the cord gets damaged, plug in a new one
- Rotating dust extractor connector, easy to adjust the dust extraction
- Spring-loaded riving knife, retracts into the housing automatically during plunge cuts
- MMC electronics with 6 control and monitoring functions, including soft start, constant speed under load, stepless speed adjustment, temperature and current-triggered overload protection
- FastFix saw blade changing system for easy blade change
- Triple motor bearing, improves running smoothness and extends service life
- Zero-play guidance, adjust the saw base on the guide rail without tools
- Splinter guard on both sides of the cut, guide rail rubber splinter guard on one side, attachable plastic splinter guard on the other
- Includes: (1) 55" Guide Rail (491498), (1) 48-Tooth Carbide Blade (491952), (1) Limit Stop FS/2 (491582), (1) Plastic Splinter Guard (pack of 5 available as 491473), (1) Plug-It Power Cord, In Systainer 4 (445597)

Packing & Sold In: Each

Item#
FJ561174

CIRCULAR SAW
FESTOOL
Plunge Cut Design

- Festool model #: Kapex TS75EQ
- Cutting depth, 2-15/16" or 2-3/4" with the included guide rail
- 13 amps of adjustable power
- Weighs less than 14 lb.
- Quick and easy cutting depth adjustment
- Bevel unit allows you to swivel the blade by up to 45 degrees on the guide rail for clean cut edges even on bevel cuts
- Detachable Plug-it cord, if the cord is damaged, plug in a new one
- Rotating dust extractor connector, easy to adjust the dust extraction
- Spring-loaded riving knife, retracts into the housing automatically during plunge cuts
- MMC electronics with 6 control and monitoring functions, including soft start, constant speed under load, stepless speed adjustment, temperature and current-triggered overload protection
- FastFix saw blade changing system for easy blade change
- Triple motor bearing, improves running smoothness and extends service life
- Zero-play guidance, adjust the saw base on the guide rail without tools
- Splinter guard on both sides of the cut, guide rail rubber splinter guard on one side, attachable plastic splinter guard on the other
- Slip clutch drastically reduces the effects of kickbacks
- Includes: (1) 75" guide rail (491503), (1) Universal saw blade (4953808, 36 teeth), (1) Limit stop FS/2, (491582), (1) Plastic Splinterguard (pack of 5 available as 491473), In Systainer 5

Packing & Sold In: Each

Item#
FJ561188

SLIDING COMPOUND MITER SAW
FESTOOL

- Festool Model #: Kapex KS120
- Cutting depth 90º/90º: 12" x 3-15/32"
- Special cutting depth: 4-23/32" x 3/4"
- Flexible, removable dust hood to the rear of the blade deflects the waste material in the directional dust port
- 50º left miter and 60º right miter position
- 13 amps of adjustable power
- Speed: 1,400 - 3,400 RPM
- Fully adjustable dual line lasers define the cut are for precise cut placement
- MMC allows you to match the speed of the blade with the requirements of the material
- Oversized bevel scale facilitates precision angle setting
- FastFix saw blade changing system for easy blade change
- Weighs 47 lb.
- Includes: 60 tooth high quality carbide blade (495388), MiterFast angle transfer device, Hold down clamp and Wrench

Packing & Sold In: Each

Item#
FJ561287

CIRCULAR & MITER SAW ACCESSORIES

FESTOOL

NOTE: For use with Festool® TS55EQ & TS75EQ Circular Saws and Kapex KS120 Miter Saw.
Packing & Sold In: Each

	Description	Item#
A	**PARALLEL EDGE GUIDE** • Designed for use with Festool Circular Plunge Saw • Create parallel cuts from an edge • Can be used on both sides of the saw • Rip capacity from the blade side to 11-13/16" (300mm) and on the motor side to 3-3/4" (95mm) NOTE: For use with FJ561174 (TS 55 EQ) only.	FJ491469
B	**SPLINTERGUARD** • Off-cut side and integrated rail splinter guard • Plastic splinter guards for FJ56114 (TS 55 EQ) and FJ561188 (TS 75 EQ) • Splinter free cross cuts in a single pass	FJ491473
C	**LIMIT STOP** • Set stop points on the guide rail for repeat cuts and plunge cuts • Adjustable placement along the entire rail, reduces kickback NOTE: For use with FJ561174 (TS 55 EQ) and FJ561188 (TS 75 EQ) only.	FJ491582
D	**COVER PLATE** • Encloses blade housing for improved dust extraction when cutting vertically or overhead • Can also be used for creating architectural false joints NOTE: For use with FJ561174 (TS 55 EQ) only.	FJ491750
E	**PLUG-IT POWER CORD** • Designed for use with Festool Circular Plunge Saw • 13" long • 16 gauge NOTE: For use with FJ561174 (TS 55 EQ) and FJ561188 (TS 75 EQ) only.	FJ490656
F	**CROWN STOP WITH BASE FOR KAPEX KS 120 MITER SAW** • Adjustable stops support nested work pieces at any angle • Provide enhanced material support to the left or right NOTE: For use with FJ561287 (Kapex KS 120 EB) only.	FJ494369


A

B

C

D

E

F

MULTIFUNCTIONAL TABLE
FESTOOL
Kapex KS 120 EB

- Specially designed height and size for use with Kapex sliding compound miter saw
- Brings work surfaces to the same level for stock support

NOTE: For use with FJ561287 (Kapex KS 120 EB) only.
Packing & Sold In: Each

Item#
FJ495565

MULTIFUNCTIONAL TABLE
FESTOOL

- V-groove channels make adjustments both faster and easier
- Guide rail system: For use with the TS plunge saws and OF routers; make cutoffs, angle cuts and compound cuts, use with routers for dados and flutes
- System integration: For use with sawing, routing and clamping
- Grid hole pattern: Multiple holes in a uniform pattern are ideal for clamping operations
- Includes:
  - 2 each guide rail supports
  - Angle unit (protractor head)
  - Fence rail
  - Fence rail clamp
  - Adjustable stop
  - Guide rail FS 1080

Packing & Sold In: Each

Item#
FJ495462

TABLE SYSTEM ACCESSORIES
FESTOOL
Clamping Element

- Clamp material from the edges or sides using the grid hole pattern for uninterrupted surfaces
- Works with square, round or irregular shaped material
- Pack of 2 each

NOTE: For use with Festool® guide rails and multifunctional tables (MFT) only.
Packing & Sold In: Each

Item#
FJ488030

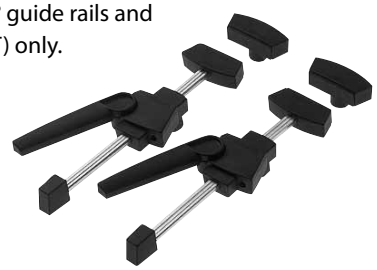

TABLE SYSTEM ACCESSORIES
FESTOOL
Ratcheting Quick Clamp

- Ratcheting mechanism allow for easy lock and quick release and secure grip on material
- Utilizes bottom T-slot of guide rail for limitless positioning

NOTE: For use with Festool® guide rails and multifunctional tables (MFT) only.
Packing & Sold In: Each

Item#
FJ491594

TABLE SYSTEM ACCESSORIES
FESTOOL
Guide Rail Screw Clamps

- Traditional screw clamp with head to be used in the bottom continuous T-slot of the guide rails to securely clamp to material
- Clamping Thickness: 4-11/16" (120mm)

NOTE: For use with Festool® guide rails and multifunctional tables (MFT) only.
Packing & Sold In: 1 pack of 2 each. Full packs only.

Item#
FJ489570

SAW DUST COLLECTOR
ChopShop Saw Hood

FastCap

- Can screw to a workbench or just drop in accessory mounting holes
- Filters dust into a box or bucket instead of all over the job site
- Protects saw when working outside in inclement weather
- Works with chop saws, lathes, and wet saws
- FASAWCLMP is for use with ChopShop Saw Hood when mounting to a tile, lathe, wet or miter saw that doesn't have holes for mounting in back (includes 2 brackets, enough to mount one saw)

Packing & Sold In: Each

Item#	Description
FASAWHOOD	Saw Hood
FASAWCLMP	Clamp

JOINER
Doweling

freud

- Freud model #: FDW710K
- Designed to drill dowel holes
- Tool works with bits from 3/16" to 1/2" (5mm to 12mm) diameter, bits are spaced 32mm from center to center
- Adjustable fence with positive detents at 0, 22.5, 45 and 90 degrees
- Micro adjustable depth gauge with zero out feature for quick and accurate depth adjustments
- Motor: 6.5 amps/18,500 RPMs
- Weight: 5.0 lb.

Packing & Sold In: Each

Item#
ABFDW710K

JOINER
Biscuits

freud

- Freud model #: JS104K
- Adjustable fence with positive detents at 0, 45 and 90 degrees
- High performance laser cut Freud blades
- Six depth setting with a maximum depth of 20mm
- Motor: 6.5 amps/10.000 RPMs
- Weight: 6.8 lb.

Packing & Sold In: Each

Item#
ABJS104K

JOINER
Biscuits

PORTER-CABLE

- Porter Cable model #: 557
- Fence tilts from 0 to 135 degrees with positive adjustable stop at 90 degrees
- Seven position rotating depth stop for FF, #0, #10, #20, biscuits Simplex, Duplex, and Max (#6) biscuits
- Includes both 2" and 4" diameter blades for standard and face-frame biscuits
- Motor: 7.0 amps/10,000 RPMs
- Weight: 7.5 lb.

Packing & Sold In: Each

Item#
RK557

INCLUDES CASE

JOINER
Biscuits

Virutex

- Virutex model #: AB11N
- Electronic control system maintains a constant speed, allowing the user to make precise grooves with all varieties of wood
- Joiner can work on panels of 5/8", 3/4", and 7/8" thickness, but it is possible to work on thicker pieces due to the movable fence
- Double insulation
- Input power: 900W
- Motor: 5 amps / 10,000 rpm
- Milling Blade: 3.94" x .86" x .156"
- Max slotting depth: 51/64"
- Weight: 7 lb.
- Carrying case included

Packing & Sold In: Each

Item#	Description
VXAB11	Biscuit Joiner
VXAB11B	Replacement Blade (3.94" diameter, 5/32" thickness, 7/8" diameter of center hole)

JOINER

FESTOOL

Biscuits

- Festool model #: DF500
- The system consists of the Domino joiner and pre-fabricated, beech and sipo Domino tenons
- Depth control - quick, precise adjustment for five different mortising depths relative to the size of the tenon required for the application
- Mortise width adjustment with rapid bit change – can change a bit in under 30 seconds
- Stepped height stop - 7 different step positions for different material thicknesses
- Pivoting fence creates angled mortises from 0-90° with positive stops at 22.5°, 45°, 67.5°
- Carbide tip spiral bit long lasting bit withstands 5,000 – 14,000 joints depending on material
- Dust extraction
- Cutter spindle speed: 24,300 rpm. Domino slot cutter diameter: 5/6/8/10 mm
- Miter routing: 0-90°; stop positions at 0°, 22.5°, 45°, 67.5°, 90°
- Movable stepped stop: 16/20/22/25/28/36/40 mm
- Power consumptions: 420W
- Routing depth stop: 12/15/20/25/28 mm. Routing height adjuster with scale: 5-30 mm
- Weight: 7 lb.
- Includes: Domino Cutter D5 (493490), Plug-It Power Cord, Support Bracket, Wrench, and Systainer 2 (445434)

Packing & Sold In: Each

Item#
FJ574307

JOINER ACCESSORIES

FESTOOL

NOTE: For use with Festool® Domino DF 500 Joiner only.
Packing & Sold In: Each

	Description	Item#
A	**DOMINO CUTTERS** - NOTE: For use with FJ574307 (Domino® DF 500 Joiner) only.	
	Tenon Size: 5mm	FJ493490
	Tenon Size: 6mm	FJ493491
	Tenon Size: 8mm	FJ493492
	Tenon Size: 10mm	FJ493493
B	**DOMINO TENONS FOR INDOOR & OUTDOOR APPLICATIONS** • Beech Domino® tenons for indoor applications • Sipo Domino tenons for outdoor applications NOTE: For use with FJ574307 (Domino® DF 500 Joiners) only.	
	5mm Thickness x 19mm Width x 30mm Length (1,800 per pack) - Indoor	FJ493296
	5mm Thickness x 19mm Width x 30mm Length (900 per pack) - Outdoor	FJ494859
	6mm Thickness x 20mm Width x 40mm Length (1,140 per pack) - Indoor	FJ493297
	6mm Thickness x 20mm Width x 40mm Length (570 per pack) - Outdoor	FJ494860
	8mm Thickness x 22mm Width x 40mm Length (780 per pack) - Indoor	FJ493298
	8mm Thickness x 22mm Width x 40mm Length (390 per pack) - Outdoor	FJ494861
	8mm Thickness x 22mm Width x 40mm Length (130 per pack) - Indoor	FJ494940
	8mm Thickness x 22mm Width x 50mm Length (600 per pack) - Indoor	FJ493299
	8mm Thickness x 22mm Width x 50mm Length (300 per pack) - Outdoor	FJ494862
	8mm Thickness x 22mm Width x 50mm Length (100 per pack) - Indoor	FJ494941
	10mm Thickness x 24mm Width x 50mm Length (510 per pack) - Indoor	FJ493300
	10mm Thickness x 24mm Width x 50mm Length (225 per pack) - Outdoor	FJ494863
C	**DOMINO SYSTAINER ASSORTMENT** • Includes: All 4 Domino Cutters, Beech Domino Tenons (1105 total): (600) 5x30, (190) 6x40, (130) 8x40, (100) 8x50, (85) 10x50, In Systainer 2 (445434) NOTE: For use with FJ574307 (Domino® DF 500 Joiners) only	FJ493301

A

B

C

JIG SAW, ELECTRIC POWERED
Heavy Duty - Variable Speed

- Freud model #: FJ85K
- Electronic cruise control – speed remains constant under different loads
- Quick-fix blade change system, tool free changing of blades
- Non-marring base attachment with anti-splintering insert
- Variable speed and 4 orbital settings
- Built-in dust collection port
- Motor: 6 amps / 120vac
- Speed control: electronic cruise control
- Stroke length: 1"
- Strokes Per Minute: 500 to 3000
- Max Cutting depth: 2-3/8"
- Blades: accepts Bosch type shanks
- Weight: 5.4 lb.
- Includes: carrying case

Packing & Sold In: Each

Item#
ABFJ85K

JIG SAW, ELECTRIC POWERED
Barrel Grip & Top Handle Designs - Variable Speed

- Bosch model #'s: 1584AVSK and 1587AVSP-1
- Patented tool-free blade change out system makes for fast and easy blade changes
- T-shank blade clamp mechanism eliminates play and vibration
- Three position variable speed dial allows user to match tool speed to work piece
- Footplate tilts up to 45 degrees
- Motor: 5.0 amp
- Speed / Strokes per minute: 500 to 3,100
- Overall length: 10-5/8"
- Weight: 5.5 lb.
- Includes: Both jig saws come with 3 blades and plastic carrying case

Packing & Sold In: Each

Item#	Description
BL1584AVSK	Jigsaw Kit
BL1587AVSK	Top Handle Jig Saw

BL1584AVSK

BL1587AVSK

JIG SAW, ELECTRIC POWERED
D-Handle Grip, Variable Speed

- Festool model #: PSB 300 EQ
- Variable stroke - Four unique stroke settings vary from straight plunge action for smooth cuts to aggressive orbital action for rapid cuts
- Carbide guidance system - rigidly supports the blade at exactly the pre-set angle, reducing blade wander in tight radius cuts; eliminating cutting errors
- MMC electronics - soft-start to soften start-up jolts, variable speed control, constant speed under load
- Fastfix blade changing system allows for quick, tool-free blade changes
- Solid one-piece splinterguard mounts in the foot of the tool for zero-clearance
- Dual bevel base - 45° dual bevel for angled cuts & a zero degree detent for perpendicular cuts
- Non-marring sub-base
- Dual port dust extraction and chip deflector
- Stroke adjustment: 4 Stages
- Strokes Per Minute (1"): 1,000 to 2,900
- Bevel Angle Range: 0 to 45 degrees
- Max cutting depth non-ferrous metals: 3/4", soft steel: 3/8", wood: 4-3/4"
- Power: 6 amps, 120vac
- Watts: 720
- Weight: 5.06 lb.
- Includes: Chip Guard (453491), Multi-Purpose Wood Saw Blades (486551, 486563), Plug-It Power Cord, Splinterguard (490120), In Systainer 1 (445433)

Packing & Sold In: Each

Item#
FJ561123

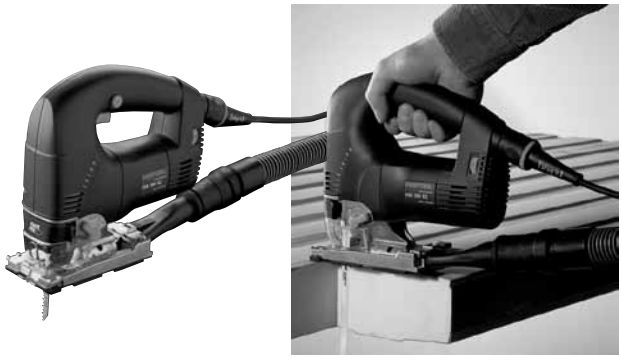

JIG SAW, ELECTRIC POWERED

FESTOOL

Barrel Grip Design, Variable Speed

- Festool model #: PS 300 EQ
- Variable stroke, four unique stroke settings vary from straight plunge for smooth cuts to aggressive orbital action for rapid cuts
- Carbide guidance system - rigidly supports the blade at exactly the pre-set angle, reducing blade wander in tight radius cuts; eliminating cutting errors
- MMC electronics - soft-start to soften start-up jolts, variable speed control, constant speed under load
- Fastfix blade changing system allows for quick, tool-free blade changes
- Solid one-piece splinterguard mounts in the foot of the tool for zero-clearance
- Dual bevel base - 45° dual bevel for angled cuts & a zero degree detent for perpendicular cuts
- Non-marring sub-base
- Dual port dust extraction and chip deflector
- Stroke adjustment: 4 Stages with 1,000 to 2,900 strokes per minute at 1"
- Bevel Angle Range: 0 to 45 degrees
- Max cutting depth non-ferrous metals: 3/4", soft steel: 3/8", wood: 4-3/4"
- Power: 6 amps, 120vac
- Watts: 720
- Weight: 5.06 lb.
- Includes: Chip Guard (453491), Multi-Purpose Wood Saw Blades (486551, 486563), Plug-It Power Cord, Splinterguard (490120), In Systainer 1 (445433)

Packing & Sold In: Each

Item#
FJ561097

JIG SAW ACCESSORIES

FESTOOL

NOTE: For use with FJ561097 (PS 300 EQ) and FJ561123 (PSB 300 EQ) Jig Saws only.
Packing & Sold In: Each

	Description	Item#
A	**GUIDE STOP** • Guide your jigsaw with any length guide rail for straight repeatable cuts	FJ490031
B	**SPLINTERGUARD** • Solid one piece splinter guard • Custom cut for each blade • Prevents splintering	
	Splinterguard 5 pack	FJ490120
	Splinterguard 20 pack	FJ490121
C	**CHIP GUARD** • Provides a clear view of the work piece • Helps to capture flying chips • Used to maximize dust extraction	FJ453491
D	**PLUG-IT POWER CORD** • Designed for use with Festool Jig Saws • 13" long • 18 gauge	FJ490649

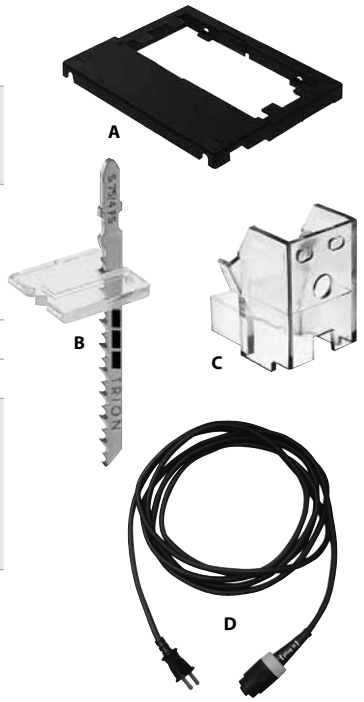

DRILL, AIR POWERED
1/4" Reversible

- Speed (RPM): 1,800
- Air Inlet (NPT): 1/4"
- Hose Size (ID): 3/8"
- Air Pressure (PSI): 90
- Air Consumption (CFM): 4
- Length: 7"
- Weight: 2.50 lb.

Packing & Sold In: Each

Item#	Clutch Type	Torque
TCSM802	Adjustable Clutch	25", 145 lb.
TCSM804	Positive Clutch	115 lb.

DRILL, AIR POWERED
3/8" Reversible

- Speed (RPM): 1,800
- Air Inlet (NPT): 1/4"
- Hose Size (ID): 3/8"
- Air Pressure (PSI): 90
- Air Consumption (CFM): 4
- Spindle Thread: 3/8"-24
- Length: 6.5"
- Weight: 3 lb.

Packing & Sold In: Each

Item#
TCSM705

DRILL, CORDLESS
Bosch PS20-2

- 80 in.- lb. of torque , drives 100 3" screws per battery charge
- Ultra compact power & design, almost half the size of a 12V compact drill/driver
- LED light for tight spaces and applications
- Forward/reverse button
- Quick change chuck prevents bit loss in drill or drive mode - pull to insert or release 1/4" hex shank bits
- 10+1 clutch, enables precision driving and eliminates over torque in soft base materials; Max mode allows pilot and other small bore holes
- Variable speed trigger
- Includes: (1) carrying case, (2) 1.5" power drive bits, (1) 30 minute charger, (2) Litheon™ 10.8V Batteries

Packing & Sold In: Each

Item#
BLPS20-2

DRILL, CORDLESS
Bosch PS10-2

- 80 in.-lb. of torque, drives 100 3" screws per battery charge
- Ultra-compact 3.5" total head length
- 90-degree articulating head rotates and locks into five positions for increased versatility
- 7+1 electronic clutch with precision driving, eliminates over torque in soft base materials; Drill mode allows pilot and other small bore holes
- Forward/reverse button
- Quick change chuck prevents bit loss in drill or drive mode, pull to insert or release 1/4" hex shank bits
- Storage hanger
- Variable speed trigger
- Includes: (1) Carrying Case, (2) 1.5" Power Drive Bits, (1) 30 Minute Charger, (2) Litheon™ 10.8V Batteries

Packing & Sold In: Each

Item#
BLPS10-2

DRILL, CORDLESS
Brute Tough™

- 50 in.-lbs more torque, 200 RPM faster, over three times longer life than previous generation
- New 1/2" Metal Chuck increased durability and 25% more grip force than previous generation
- Durashield™ Housing & unibody powertrain provide optimum reinforcement to withstand real world conditions
- New Two Speed Gearbox: High torque mode produces over 550 in.-lb. (Dynamic Torque)
- High speed mode produces 1,700 RPM
- High Strength Metal Collar - Enhances durability and protects tool when dropped on the chuck
- Newly Designed Powertrain and Gears - For increased life and durability
- 25 Position Clutch
- Variable speed trigger - For complete control
- Externally Accessible Brushes - For brush replacement in as little as 2 minutes
- Ergonomic two-tone soft grip handle - For extended comfort and control

Item#
BL35614

Includes: (2) 2.0A-h Batteries - BAT140, (1) 30-Minute Single Bay Charger - BC130, (1) Magnetic Bit Holder - 2610917319, Phillips Drive Bit Included and Side Handle/Carrying Case

Packing & Sold In: Each

DRILL, CORDLESS
TDK Cordless Drill Set

FESTOOL

- Includes:
  - 1 TDK 15.6 drill
  - 2 NiCD 2.4 Ah battery packs
  - LC 45 charger
  - Centrotec chuck (492135) with starter set including 4mm wood drill, Phillips 2 bit and Centrotec bit holder/adapter
  - FastFix (quick connect) straight chuck (490698)
  - FastFix (quick connect) right angle (490293) and eccentric (490294) chucks

Packing & Sold In: Each

Item#
FJPTDK15S

DRILL, CORDLESS
C12 Cordless Drill

FESTOOL

- High power batteries with smart charger for long service life
- Motor design allows short drill head for compactness
- EC-TEC motor without carbon brushes produces virtually no mechanical wear
- Stepless electronic speed control for work in any material
- Soft grip for comfort on long jobs. Good center of gravity for long jobs
- On-board magnetic bit holder
- Takes Centrotec and FastFix chucks
- Spring contacts are cleaned automatically every time the battery pack is slotted into position
- Charging Time: 25 minutes
- Includes : (2) NiCad 1.3 Ah battery packs (493348), LC 45 charger (492138), Centrotec chuck(492135) with starter set including 4mm wood drill, Phillips 2 bit and Centrotec bit holder/adapter, FastFix (quick connect) straight chuck (490698) and In Systainer 1 (445433)

Packing & Sold In: Each

Item#	Battery Type
FJ564178	NiCD 1.3 Ah
FJ564179	NiCD 2.4 Ah
FJ564180	NiMH 3.0 Ah

DRILL, CORDLESS
Industrial C12 Drill Set

FESTOOL

- High power batteries with smart charger for long service life
- New motor design allows short drill head for compactness
- EC-TEC motor without carbon brushes produces virtually no mechanical wear
- Stepless electronic speed control for work in any material
- Soft grip for comfort on long jobs
- Good center of gravity for long jobs
- On-board magnetic bit holder
- Takes Centrotec and FastFix chucks
- The spring contacts are cleaned automatically every time the battery pack is slotted into position
- Includes:
  - (5) C12 Drills
  - (5) 1.3 Ah, NiCD batteries
  - (5) Centrotec chucks
  - (5) FastFix chucks
  - (8) NiCD batteries
  - (3) Chargers

Packing: Each

Item#	Battery Type
FJPC12135	NiCD 1.3 Ah

DRILL, CORDLESS
C12 Cordless Drill Set

FESTOOL

- High power batteries with smart charger for long service life
- New motor design allows short drill head for compactness
- EC-TEC motor without carbon brushes produces virtually no mechanical wear
- Stepless electronic speed control for work in any material
- Soft grip for comfort on long jobs
- Good center of gravity for long jobs
- On-board magnetic bit holder
- Takes Centrotec and FastFix chucks
- The spring contacts are cleaned automatically every time the battery pack is slotted into position
- Includes: (2) NiCad 1.3 Ah battery packs (493348), LC 45 charger (492138), Centrotec chuck (492135) with starter set including 4mm wood drill, Phillips 2 bit and Centrotec bit holder/adapter, FastFix (quick connect) straight chuck (490698), FastFix (quick connect) right angle (490293) and eccentric (490294) chucks, In Systainer 1 (445433)

Packing & Sold In: Each

Item#	Battery Type	Includes
FJPC1213S	NiCD 1.3 Ah	(2) NICAD 1.3 Battery Pack
FJPC1224S	NiCD 2.4 Ah	(2) NICDA 2.4 Battery Pack
FJPC1230S	NiCD 3.0 Ah	(2) NICAD 3.0 Battery Pack

DRILL ACCESSORIES

WÜRTH

Right Angle Drill Attachment Magnetic 1/4" Bit Mount with Quick- Change Chuck

- Suitable for use with electric drills and battery operated driver drills
- Specially hardened steel enables maximum torque with a maximum speed of 2,000 RPM's
- Secure hold and 360˚ step-free adjustable handle
- Suited for screwing in cramped and hard-to-reach places

Packing & Sold In: Each

Item#	Size
WW6149000	6.5" L x 1.26" W x 1.97" H

DRILL ACCESSORIES

FESTOOL

NOTE: For use with FJ574266 (OF 1010 EQ) and FJ574267 (OF 1400 EQ) Drills only.

Packing & Sold In: Each

	Description	Item#
A	**FASTFIX DEPTH STOP CHUCK** • Integral clutch maintains depth independent of torque setting • Quick-out ring backs out screws without affecting depth setting NOTE: For FJ564178 and FJ564179 (C 12) only.	FJ493539
B	**FASTFIX ECCENTRIC CHUCK** • Offset chuck places bit flush to side, lets you drill or drive right into corners • Chuck rotates 360 degrees, with 16 presets • Quick-release collar won't mar adjoining surfaces	FJ490294
C	**FASTFIX RIGHT ANGLE CHUCK** • Right angle chuck for close quarters • 1/4" Hex drive with wire detent, also accepts Centrotec® or keyless chuck • Chuck rotates 360 degrees, with 16 presets	FJ490293
D	**BATTERY PACK** • Battery pack for CDD (NiCd) 12 volt, 2.0 Ah	FJ488438
E	**CENTROTEC BIT HOLDER BH 60** • Magnetic bit holder, lets you use standard bits with Centrotec chuck • Also compatible with standard chuck • 2-3/8" Length	FJ492539
F	**LR 32 HOLE DRILLING SET** • Includes: Guide plate, centering mandrel, linear stops and two edge stops for drilling • European 32mm grid pattern holes in shelves and cabinets	FJ583290

DRILL ACCESSORIES
Decorative Hardware Jig
For Cabinet Doors

- Adjusts horizontally and vertically
- Reversible for right/left, upper/lower doors
- Used for knobs and 3", 3-1/2" or 4" center pulls

Packing & Sold In: Each

Item#
EJ1000

DRILL ACCESSORIES
DECORATIVE HARDWARE JIG
Metric Insert

- Insert for door & drawer jigs
- Used for 96mm & 128mm center handles
- Alignment notches on slide for quick set-up

Packing & Sold In: Each

Item#
EJ1500M

DRILL ACCESSORIES
Drill Guide

For accurate alignment and centering of handles and knobs. Guide line on fence assures accurate centering.
- Made of anodized aluminum
- Replaceable hardened steel drill bushings (AR101B)
- Adjustable hole centers for handles
- Uses standard 3/16" drill bit

Packing: As shown below.
Sold In: Full box quantities only.

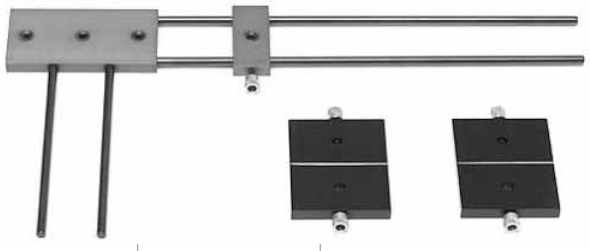

Item#	Description	Box Qty
ARDG101	Drill Guide	1
AR101B	Repl. Bushings	4

DRILL ACCESSORIES
Decorative Hardware Jig
For Cabinet Drawers

- Works on all sizes of cabinet drawer
- Adjusts horizontally and vertically
- Alignment arrows on face & notches on slide & frame for quick set-up
- Used for knobs and 3", 3-1/2" or 4" center pulls

Packing & Sold In: Each

Item#
EJ2000

DRILL ACCESSORIES
Drill Guide Shelf Pin

For line boring with a hand held drill
- Made of anodized aluminum
- Replaceable hardened steel drill bushings
- Adjustable stops for custom drilling as needed
- Bar length is 34" long and has 25 drill bushings

Packing & Sold In: Each

Item#	Description
ARDG102	1/4" drill bushings on 1.25" centers
ARDG103	5 mm drill bushings on 32 mm centers

DRILL ACCESSORIES
Precision Drill Guide

- For use with 3/8" and 1/2" power drills
- Includes 3/8" capacity chuck with key
- Protractor scale adjusts body from 0-45 degrees left and right, in 5 degree increments
- V-Guides for drilling through rounded stock or dowel
- Positive stop for accurate drill depth
- Centering channel on base for edge drilling
- Includes 1/4", 5/16" & 3/8" Brad Point Bits
- Folds flat for storage

Packing & Sold In: Each

Item#
GH36-37

AIR COMPRESSOR, ELECTRIC POWERED
3 Gallon, 1 HP Hand Carry

BOSCH

- Bosch model #: CET3-10
- Vertically angled tanks that are ergonomically balanced for comfort
- EZ Drain System for fast efficient draining
- Recessed control panel and roll cage protect components from damage
- Powerful and quiet induction motor - 4 pole induction motor with a dBA of 72
- Power: 1 HP, 1700 RPM
- CFM @ 100 PSI: 2.6
- Tank Capacity: 3 gallons
- Recovery Time: 14 seconds
- Dimensions: 16.25"H x 16"L x 17"W
- Weight: 57.3 lb.
- Compressor comes with oil in the pump

Packing & Sold In: Each

Item#
BLCET3-10

AIR COMPRESSOR, ELECTRIC POWERED
5.2 Gallon, 2.5 HP Hand Carry

SENCO BRANDS

- Senco model #: PC1108
- Compressor has (2) universal couplers for operating two tools
- Direct drive motor
- Cold weather start-up valve
- Wheel barrow tank configuration
- Oil-splash lubrication
- Oversized pneumatic wheels for easy maneuvering
- Power: 2.5 HP, 13 amps
- Max Pressure: 150 psi
- Tank Capacity: 5.2 gallons
- Recovery Time: 24 seconds (120-150 psi)
- Pump Up Time: 90 seconds (0-150 psi)
- Dimensions: 19"H x 28"L
- Weight: 88 lb.
- Compressor includes oil

Packing & Sold In: Each

Item#
SNPC1108

AIR COMPRESSOR, ELECTRIC POWERED
4 Gallon, 2 HP Hand Carry

BOSCH

- Bosch model #: CET4-20
- Vertically angled tanks that are ergonomically balanced for comfort
- EZ Drain System for fast efficient draining
- Recessed control panel and roll cage protect components from damage
- Powerful and quiet induction motor - 24 pole induction motor with a dBA of 80
- Power: 2 HP, 3400 RPM
- CFM @ 100 PSI: 4.2
- Tank Capacity: 4 gallons
- Recovery Time: 10 seconds
- Dimensions: 19.75"H x 16.25"L x 7.75"W
- Weight: 84.9 lb.
- Compressor comes with oil in the pump

Packing & Sold In: Each

Item#
BLCET4-20

AIR HOSE
Re-Koil, Polyurethane

MILTON

- Most flexible of all re-koil hoses, has excellent shape retention
- Resists abrasions, corrosive materials, oil & grease
- Completely assembled with 18" straight hose whip with swivel fittings on both ends
- Maximum working pressure: 125 PSI @ 70° F
- Working temperature: -50° F to 180° F (-46° C to 82° C)
- Yellow color

Packing & Sold In: Each

Item#	Hose I.D.	Length	Swivel Male NPT
MF1671-10	1/4"	10'	1/4"
MF1671-20	1/4"	20'	1/4"
MF1673-20	1/4"	30'	1/4"

POLYURETHANE AIR HOSE
Field Repairable

- Lightweight and tough
- Strain relief ends incorporate a built-in reusable fitting, which makes these hoses field repairable
- Retains flexibility in subzero temperatures (down to -40° F)
- UV stabilized for longer outdoor service life
- Resistant to lubricating oils, greases and abrasion
- Made in the USA

Packing & Sold In: Each

Item#	Hose I.D	Length	Fittings, NPT
WW69991425	1/4"	25'	1/4"
WW69991450	1/4"	50'	1/4"
WW69993825	3/8"	25'	1/4"
WW69993850	3/8"	50'	1/4"
WW699938251	3/8"	25'	3/8"
WW699938501	3/8"	50'	3/8"

AIR HOSE
Re-Koil, Nylon

- Assembled with re-usable, full flow male NPT swivel fittings on both ends to avoid twisting and kinking
- Resists abrasions
- Maximum working pressure: 200 PSI @ 70° F
- Working temperature: -40° F to 180° F (-38° C to 82° C)
- Yellow color

Packing & Sold In: Each

Item#	Hose I.D.	Length	Swivel Male NPT
MF1667	1/4"	12'	1/4"
MF1669	1/4"	25'	1/4"

AIR HOSE
EPDM 2 Braid, Rubber

- Deluxe heavy duty EPDM rubber is designed for tough service station and shop applications
- Kink resistant and flexible in extreme temperatures, resists abrasion, weathering and ozone
- Limited oil resistance
- Maximum working pressure: 250 PSI
- Burst pressure: 1000 PSI
- Working temperature:-40° F to 190° F (-38°C to 87° C)
- EPDM rubber tube & cover, spiral synthetic yarn reinforcement
- Red in color

Packing: 25' hose comes coupled with brass fittings 100' bulk hose comes without fittings in a dispensing box

Item#	Hose I.D.	Length	Fittings, NPT	Hose O.D.
MF1630	1/4"	25'	Male, 1/4" both ends	-
MF1632	3/8"	25'	Male, 3/8" both ends	-
MF1630-100	1/4"	100'	-	5/8"

AIR COUPLERS
"Kwik Change" M Style

- Coupler bodies are brass with brass sleeves
- Maximum inlet pressure: 300 PSI
- Maximum temperature: 250° F
- Air flow: 40 SCFM
- Seals: Buna-N

Packing: As shown below.
Sold In: Both broken and full box quantities. Discount available for full box orders.

Item#	Connection	Box Qty
MF715	1/4" NPT Female	10
MF716	1/4" NPT Male	10
MF717	1/4" Hose Barb	10
MF718	3/8" NPT Female	10
MF719	3/8" NPT Male	10

AIR HOSE ACCESSORIES
Male Hex Nipple

Packing: As shown below.
Sold In: Both broken and full box quantities.
Discount available for full box orders.

Item#	Thread Size	Box Qty
MF646	1/4" NPT x 1/4" NPT	10

AIR HOSE ACCESSORIES
Female Hex Coupling

Packing: As shown below.
Sold In: Both broken and full box quantities.
Discount available for full box orders.

Item#	Thread Size	Box Qty
MF643	1/4" NPT x 1/4" NPT	10

COMPOSITE-STYLE COUPLER
1/4" Male

- Composite-style design provides maximum air flow to tools.
- Easy connect/disconnect by single push-button action.
- Shock-proof, low-vibration, crush-resistant
- Lightweight 1.4 oz., non-marring composite material

Packing & Sold In: Each

Item#
DY94980

AIR HOSE ACCESSORIES
Air Plugs "Kwik Change" M-Style

- Plugs are case hardened steel, plated to resist rust
- Maximum inlet pressure: 300 PSI
- Maximum temperature: 250° F
- Air flow: 40 SCFM
- Seals: Buna-N

Packing: As shown below.
Sold In: Both broken and full box quantities.
Discount available for full box orders.

Item#	Connection	Box Qty
MF727	1/4" NPT Male	10
MF728	1/4" NPT Female	10
MF732	3/8" NPT Female	10
MF733	3/8" NPT Male	10
MF736	1/4" Hose Barb	10

AIR HOSE ACCESSORIES
Full Swivel Hose End

- Full 360° swivel hose ends help eliminate kink and twisted airlines
- Steel construction, black oxide finish

Packing: As shown below.
Sold In: Both broken and full box quantities.
Discount available for full box orders.

Item#	NPT	NPT or I.D.	Box Qty
MF659	1/4" Male End	1/4" NPT Female Swivel End	10

AIR HOSE ACCESSORIES
Stainless Steel Worm Drive Hose Clamps

Packing: As shown below.
Sold In: Both broken and full box quantities.
Discount available for full box orders.

Item#	Min I.D Closed	Max O.D. Opened	Band Width	Box Qty
MF1602	7/32"	5/8"	5/16"	10

AIR HOSE ACCESSORIES
Brass Hose Ends

Packing: As shown below.
Sold In: Both broken and full box quantities.
Discount available for full box orders.

Item#	Type	Hose I.D.	Thread	Box Qty
MF600	Male	1/4"	1/4" NPT	10
MF602	Male	3/8"	1/4" NPT	10
MF605	Female, Non-Swivel	1/4"	1/4" NPT	10
MF605-2	Female, Non-Swivel	3/8"	1/4" NPT	10

COMPOSITE DYNASWIVEL
1/4" NPT

- For use with most air tools: grinders, sanders, staple guns, drills, etc.
- Universal-joint connects portable air tools to an air line
- Improves tool maneuverability, minimizes operator fatigue and extends hose life
- Swivels 360deg at 2 pivot points allowing the air hose to drop directly to the floor while providing superb tool handling

Packing & Sold In: Each

Item#	Air Flow Range (LPM)
DY94300	Up to 33 SCFM (935)

AIR HOSE REPAIR KITS
For 1/4" Air Hose

- Includes: 1 each #699 1/4" female air chuck; 1 each #663 1/4" NPT x 1/4" ID male hose end; 1 each #676 1/4" ID hose mender; 3 each #1602 Hose clamps for 5/8" OD hose

WARNING: Kit includes a sealing type chuck that is not for use on Milton inflator gages

Packing & Sold In: Each

Item#
MF620

AIR HOSE ACCESSORIES
3 In 1 Air Manifolds

- Supply 3 air tools from a single inlet
- No need to disconnect and connect for every tool change
- Sturdy, lightweight aluminum body

Packing & Sold In: Each

Item#	Inlet NPT Female	3 Outlets NPT Female
MFS685-6	3/8"	1/4"

AIR TOOL LUBRICANT

- Use 2-3 drops at the end of each day, or as needed, to maintain tool performance
- 4 fl oz bottle

Packing & Sold In: Each

Item#
MM20451

COMPRESSOR ACCESSORIES
Pump Oil

- Premium grade oils formulated with high quality naphthenic distillate stocks
- Recommended for all oil splash compressors
- Protects against corrosion

Packing: Both broken and full box quantities.
Sold In: Discount available for full box orders.

Item#	Size	Box Qty
LLPC344	32 fl. oz.	12

AIR TOOL LUBRICATING OIL

- Premium grade oils formulated with high-quality paraffin distillate stocks
- Contains an effective antifoamant, rust and oxidation inhibitor

Packing: As shown below.
Sold In: Both broken and full box quantities. Discount for full box orders.

Item#	Size	Box Qty
LLPC102	32 fl. oz.	12

EGDEBANDER
Hand Held, Hot Air

- The only manual bander with tracking of tape on the board
- For pre-glued PVC, polyester, melamine, and wood veneer of up to 2" wide (50mm)
- A set of rubber clamps hug the board so you can get the most accurate tracking of the tape on the board
- Easy adjustment and application on contour edge banding
- Minimum interior radius: 2"
- Two step temperature switch:
  - Step one: 300˚C or 570˚F
  - Step two: 525˚C or 1,000˚F
- Air delivery: 400 L/min. or 16 CV. feet/min.
- Set up time of less than 1 minute
- Weight: 6 lb. (2.7 kg)

Packing & Sold In: Each

Item#
VXAG98

EDGEBANDING SYSTEM

- Can handle hot-melt adhesive wood and polyester edge banding and comes complete with a heavy-duty industrial heat gun
- The guides are completely adjustable and will accommodate materials as wide as 2-1/4"
- Capable of applying edge banding to straight and curved edges

Packing & Sold In: Each

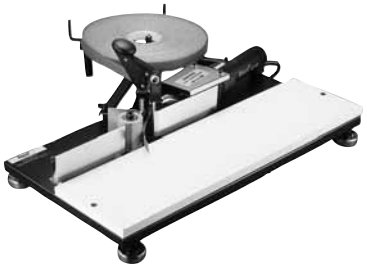

Item#
ABEB100